



IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY



VOLUME : 5 ISSUE : 1 Print / Issue Publication Date: 13-Jul-2020



ISSN : 2455-2143



DOI : 10.33564/IJEAST.2020.v05i01.079

Indexed In



WWW.IJEAST.COM

editor@ijeast.com



MICROSTRIP PATCH ANTENNA FOR FIFTH GENERATION WIRELESS COMMUNICATION USING DGS TECHNIQUE

M.Ranga Rao
Professor

Department Of Electronics And Communication Engineering, Vijayawada
Potti Sriramulu Chalavadi Mallikarjuna Rao College Of Engineering & Technology,
Vijayawada

K. Sowmya, T. Ayyappa, P. Phani Sree
Students

Department Of Electronics And Communication Engineering, Vijayawada
Potti Sriramulu Chalavadi Mallikarjuna Rao College Of Engineering & Technology,
Vijayawada

ABSTRACT - The proposed antenna is presented for the 5G wireless communication by using DGS technique. In a communication the bandwidth is one of the major parameter to transmit the signals. The 5G prefers high band width, compactness of size and good return loss. To increase the bandwidth we have various techniques such as multiple slotting technique, meta material, corner cut and DGS technique. The pros of DGS technique is to reduce a micro strip patch antenna resonating at 4.6 GHz. For this purpose, DGS is employed to shift the frequency of an initial micro strip antenna from 5.5 GHz to 4.6 GHz without disturbing the current distribution. Comparison of the proposed DGS antenna with other techniques shows the unique capability of the DGS technique to get a beneficial result. The prototype of an antenna was designed with the FR4 substrate 4.4, thickness 1.6 mm, and the dimensions of the antenna is 33x36 mm². The proposed antenna is designed for different applications such as INSAT, WLAN and telecommunication.

Keywords: Defected ground structure (DGS), micro strip patch antenna.

I. INTRODUCTION

The incredible growth of wireless devices has brought various improvements in the fourth advanced standards for communication networks. 4G LTE network have many commercial services it works very efficiently to meet the demands of high-

throughput and high data rates, and also offers high-speed connectivity at the user end. However, this massive upgrade has increased to bandwidth scarcity, [1] which further restricts the required advancements, while consuming limited spectrum < 3 GHz [2].

To meet the 5G requests and facilitate higher capacity, greater data rate, extra connectivity, advanced reliability and minimum latency. The design approaches for antenna has higher necessity, in future 5G wireless communication network will mostly use the high frequency band [3]. The research works which has been performed by the authors on designing 5G antennas [4]. The 5G technology is expected to provide much wider than the previous one as frequency bands along with the wider spectral bandwidth per frequency channel. The 5G is also advanced in terms of high capacity to allow more devices connectivity at same time, lower battery consumption, better connectivity irrespective of the geographic region, lower cost of infrastructural development, higher reliability of the communications, highly increased peak bit rate, larger data volume per unit area. Available spectrum at the millimetre-waves (MMWs) is used in the future 5G demands of high capacity and throughput.

Micro strip patch antenna is necessary and practical component of communication systems. It is more suitable option for the microwave designers for simple design, low profile and a compact structure. The most disadvantage of the microstrip antenna is low return loss, less bandwidth and low gain [5]. Consistent with the microwave researches for the high performance

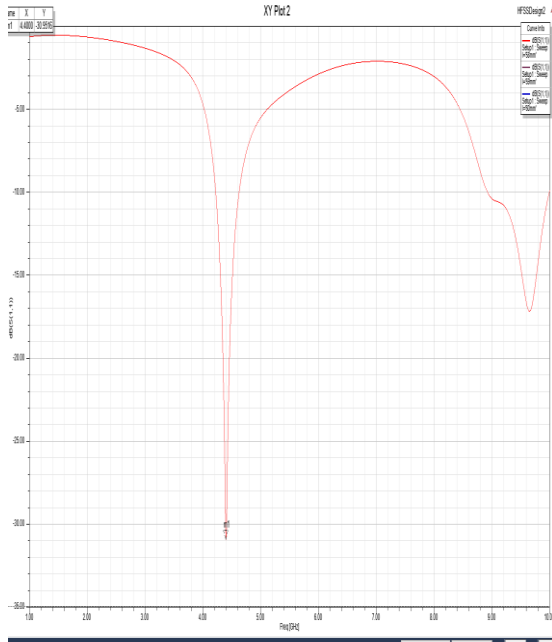


Fig3: Simulation of return loss for the antenna without DGS using ADS.

B. Defected Ground Structures (DGS)

Fig.4 shows the layout of the DGS structure located on the metallic ground plane, that is reduced to 1/4th of ground. The resonant frequency can be shifted by varying the dimensions of the ground.

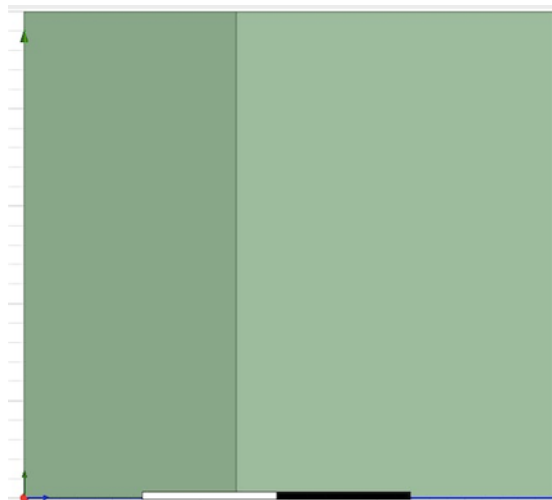


Fig4: Geometry for the proposed DGS.

III. SIMULATION RESULTS OF THE ANTENNA WITH DGS

The simulated reflection coefficient of the proposed antenna shows good matching at 4.6 GHz with a bandwidth equal to 7.32 GHz, which is from 1.05 GHz to 8.37GHz. With a return loss -47.8dB. The

result obtained for the reflection coefficient with DGS is shown in Fig. 6. We can see that the effect of the DGS shaped permit to shift the resonant frequency from 5.5 GHz to 4.6 GHz.

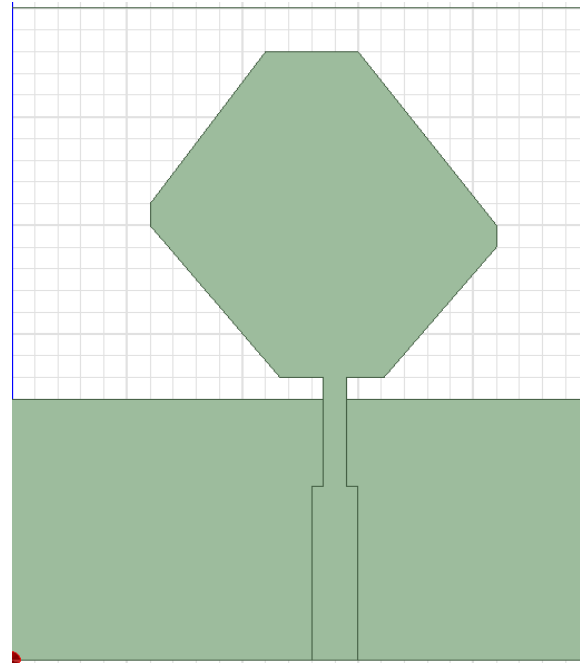


Fig5: Micro strip patch antenna with DGS.

A. Return Loss and Bandwidth

Return Loss:

In telecommunication return loss is the loss of signal power resulting from the reflection occur at a discontinuity in a transmission line. Return loss is said to both wave ratio and reflection. Increasing return coefficient loss corresponds to lower. The return loss is high whenever the match is good. In the referred paper the return loss is -33 dB but in the proposed design the return loss is -47dB.

Bandwidth:

Bandwidth is one of the most important parameter in the antenna design. Bandwidth describes the range of frequencies over which the antenna can properly radiate. In general, narrow bandwidth is used for more antennas operations and cannot be used for wide band operations. In proposed antenna the bandwidth is very high that is 7.2 GHz.

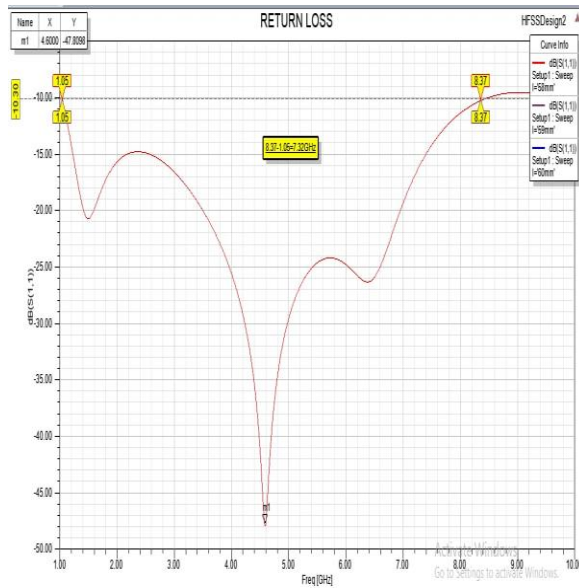


Fig6: Simulation of Return loss for the antenna with DGS at 4.6 GHz.

B. Voltage Standing Wave Ratio (VSWR)

VSWR is real and positive for an antenna. In the proposed design the VSWR is less while compared to the other references. By applying the DGS technique VSWR is 1.008dB at resonant frequency of 4.6GHz.

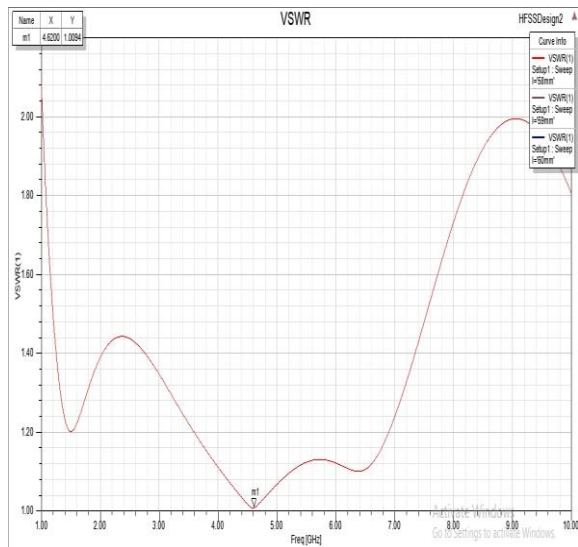


Fig7: Simulation of VSWR for the antenna with DGS at 4.6 GHz.

C. Impedance Matching

Impedance matching is also vital parameter in antenna design. Antenna impedance relates the voltage of present input. It is more useful within the high frequency section. Generally the cable will transform the impedance to the antenna it is very

difficult to deliver power, unless the antenna is matched to the cable. During this design the impedance is matched at 50 ohms so, it'll be more useful to deliver the facility.

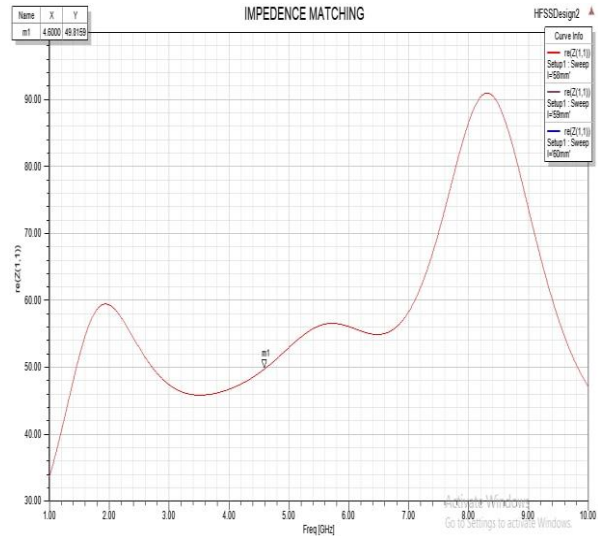


Fig8: Simulation of Impedance matching for the antenna with DGS at 4.6GHz.

IV. CONCLUSION

In this paper we have developed a new study concerning the microstrip patch antenna by using defected ground structure DGS resonating at 4.6 GHz. The goal of the work is to shift the resonance frequency from 5.5 GHz to 4.6 GHz. A microstrip patch antenna has been developed, analysed and valid for INSAT, WLAN and telecommunication applications.

V. REFERENCES

- [1] Rappaport, T.S., Sun, S., Mayzus, R., et al.: 'Millimeter wave mobile communications for 5G cellular: It will work!', IEEE Access, 1, pp. 335–349.
- [2] Jilani, S. F., & Alomainy, A. Millimetre-wave T-shaped MIMO antenna with defected ground structures for 5G cellular networks 2018. IET Microwaves, Antennas & Propagation, 12(5), 672–677.
- [3] Wang, C.-X., Haider, F., Gao, X., You, X.-H., Yang, Y., Yuan, D., ... Hepsaydir, E. Cellular architecture and key technologies for 5G wireless communication networks. IEEE Communications Magazine, 52(2), 122–130. 2014.
- [4] Zhinong Ying. Antennas in Cellular Phones for Mobile Communications, July 2012. Proceedings of the IEEE, 100(7).



[5] Er-rebyiy, R., Zbitou, J., Tajmouati, A., Latrach, M., Errkik, A., & El Abdellaoui, L. A new design of a miniature microstrip patch antenna using Defected Ground Structure DGS. 2017 International Conference on Wireless Technologies, Embedded and Intelligent Systems

[6] Mr. Kartik Ramesh Patel, Dr. Ramesh Kulkarni “Ultra-Wideband (UWB) Wireless System 2014. “(IJAIEEM) Special Issue for International Technological Conference.

[7] Roy, A., Choudhary, P. K., Anand, S., Sarkar, P. P., & Bhunia, S. “A novel approach on miniaturization of microstrip patch antenna with loaded strips,” Jan 2014 Electronics, Communication and Instrumentation (ICECI), International Conference, pp. 1-4,16-17 .

[8] Claudius Locker, Thomas Vaupel, Thomas F.Eibert,”Radiation Efficient Unidirectional Low-Profile Slot Antenna Elements For X-Band Applications”, Volume: 53 , Aug. 2005.

[9] N. Bayatmaku, P. Lotfi, M. Azarmanesh, and S. Soltani, “Design of simple multi-band patch antenna for mobile communication applications using new E-shape fractal,” 2011. IEEE Antennas Wireless Propag. Lett., vol. 99, p. 1.

[10] Shekhar, C.; Bhadauria, A.; Radhakrishna, M.“ Application of 2D defected ground structures in microstrip lines,” Jan. 2013 IEEE CONECCT, pp. 1 - 4.

[11] Rezaul Azim and Mohammad Tariqul Islam : chapter 7 “Printed wide slot Ultra-Wideband Antenna” INTECH 2013.

[12] Abraham Ortega, Leonardo R.A.X. de Menezes, A.J. Martins Soares and Humberto Abdalla Jr “Design of Low-Pass Microstrip Filters Based on Defected Ground Structure,” , 21-24 Nov. 2008. 2011 IEEE Explore pp. 69 – 74.

[13] Haiwen Liu, Xiaowei Sun and Zhengfan Li “A new parameter extraction method for DGS and its application to the low-pass filter,” IEEE Explore, June 2004, Vol. 27, pp. 119–123

IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



OPEN ACCESS

Free and unrestricted access to research for all.



GLOBAL REACH

Connecting researchers and professionals worldwide.



TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website
www.ijeast.com



INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

✉ editor@ijeast.com

🌐 www.ijeast.com

📍 India



2455-2143