

# CONSOLIDATION BEHAVIOUR OF LIME-CEMENTED BENTONITE

Mahdi Keramatikerman  
Engineer, Arup Australia, 61-73 Sturt Street,  
Suncorp Tower, Townsville QLD 4810, Australia

Amin Chegenizadeh  
Senior Lecturer, Department of Civil Engineering,  
Curtin University of Technology, Kent Street, Bentley, Perth, Western Australia 6102, Australia

Hamid Nikraz  
Professor, Department of Civil Engineering,  
Curtin University of Technology, Kent Street, Bentley, Perth, Western Australia 6102, Australia

**Abstract**— Settlement is one of the important issues in geotechnical engineering. The settlement issue in construction is of importance due to crack and possible collapse matters. This study focuses on the behaviour of cemented bentonite in respect to each load. The results showed that cement and lime reduced the settlement of bentonite.

**Keywords**— Consolidation, Bentonite, Cement

## I. INTRODUCTION

Settlement is a common issue in urban area [1-5]. Compression of the soil can cause disastrous impacts on human life. One-dimensional consolidation test is a method to experiment the settlement rate in geotechnical laboratories [6-15]. Coefficient of consolidation ( $C_v$ ) and compression index are two characteristics that can be achieved through the consolidation test [16-25]. There are many methods to reduce the settlement behavior of the soil [26-37]. Addition of agents such as cementitious products is a method to reduce this destructive behavior [38-50]. Addition of some other products such as recycled tire, sawdust, and GGBFS has shown effective in reduction of the settlement behavior of soil [51-66]. This study aims to investigate effect of lime on improvement of consolidation characteristic of the cemented bentonite.

## II. MATERIALS

Three materials were mixed together to generate the appropriate mixture to be tested. The materials are well defined as:

### a) *Bentonite:*

The bentonite clay which was sourced from supplier with  $C_u=1.3$  was selected for this study.

### b) *Cement*

Given popular usage of Portland cement. The selection was made in favor of Portland cement (PC).

### c) *Lime*

The lime selected for this study was based on major ingredient as Cao of approximately 80%.

## III. COMPACTION TESTING


Table 1 shows the compaction characteristics of the mixes.

**Table 1** Compaction characteristics of mixes


Sample Id	PC%	Lime	OMC %	MDD
B-PC-L1	2	1	42	1.24
B-PC-L3	2	3	47	1.2
B-PC-L5	2	5	51	1.18

## IV. CONSOLIDATION


The consolidation device called odometer was used to measure the consolidation coefficient of the mixes. Fig. 1 to 4 presents the effect of cement and lime in the bentonite  $C_v$  and  $C_c$  indices for the mixtures.

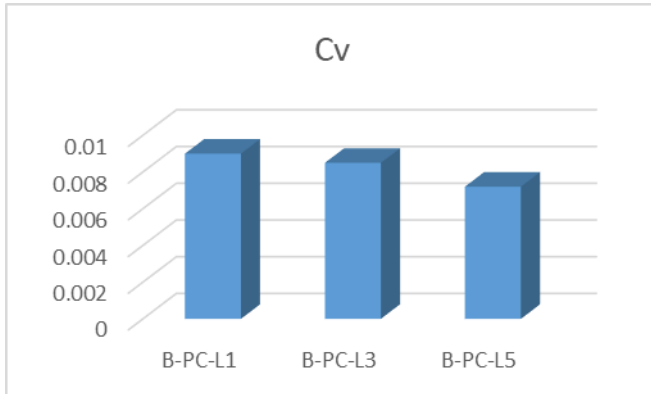


**Fig. 1** coefficient of consolidation (Cv) variations

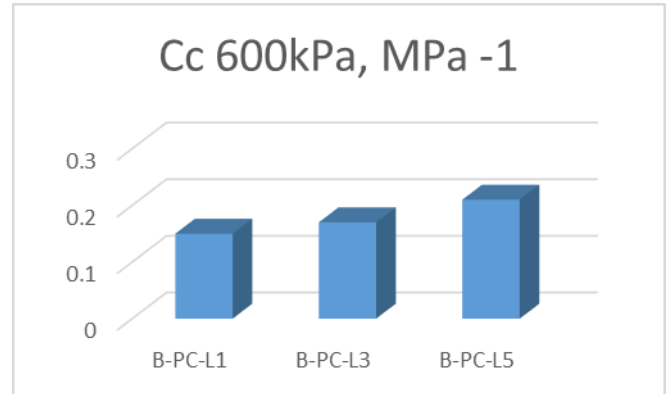

**Fig. 4** Compression index (Cc) under 600 kPa and 1 MPa normal stress.

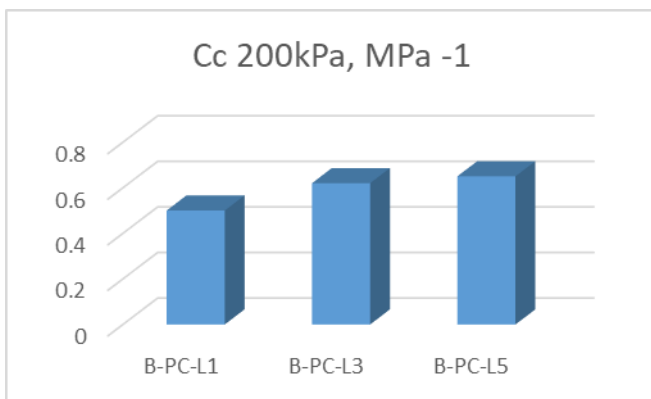

**Fig. 2** Compression index (Cc) under 200 kPa and 1 MPa normal stress.

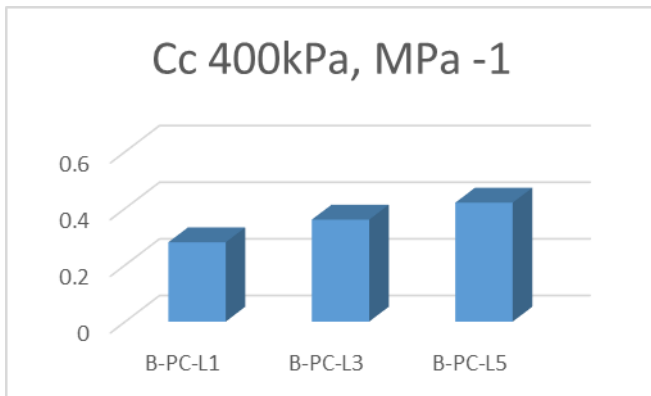

**Fig. 3** Compression index (Cc) under 400 kPa and 1 MPa normal stress.

## V. CONCLUSION

A series of consolidation test was conducted, and the results showed that Cv decreased with increasing in lime percentage and the Cc was increased in different pressure.

## VI. REFERENCES

- [1] Al-Rkaby AHJ, Chegenizadeh A, Nikraz H. (2016). Directional-dependence in the mechanical characteristics of sand: A Review International Journal of Geotechnical Engineering 10 (5), 499-509
- [2] Opdyke SM, Evans JC. Slag-cement-bentonite slurry walls. Journal of geotechnical and geoenvironmental Engineering. 2005 Jun;131(6):673-81.
- [3] Keramatikerman, M., Chegenizadeh, A., & Nikraz, H. (2018). Effect of Flyash on Post-Cyclic Behavior of Sand. *Journal of Earthquake Engineering*, 1-13.
- [4] Malusis MA, Barben EJ, Evans JC. Hydraulic conductivity and compressibility of soil-bentonite backfill amended with activated carbon. Journal of geotechnical and geoenvironmental engineering. 2009 May;135(5):664-72.
- [5] Keramatikerman, M., Chegenizadeh, A., Nikraz, H., & Sabbar, A. S. (2018). Effect of fly ash on liquefaction behaviour of sand-bentonite mixture. *Soils and foundations*, 58(5), 1288-1296.
- [6] Khushnood RA, Rizwan SA, Memon SA, Tulliani JM, Ferro GA. Experimental investigation on use of wheat straw ash and bentonite in self-compacting cementitious system. *Advances in materials science and engineering*. 2014;2014.
- [7] Keramatikerman M, Chegenizadeh A, Nikraz H. (2017). Experimental study on effect of flyash on liquefaction resistance of sand Soil Dynamics and Earthquake Engineering 93, 1-6
- [8] Lam C, Jefferis SA, Martin CM. Effects of polymer and bentonite support fluids on concrete-sand interface shear strength. *Géotechnique*. 2014 Jan;64(1):28-39.



- [9] Chegenizadeh, A., Nikraz, H. (2011). "Investigation on strength of fiber reinforced clay" *Advanced Materials Research* 261-263, pp. 957-963.
- [10] Yeo SS, Shackelford CD, Evans JC. Consolidation and hydraulic conductivity of nine model soil-bentonite backfills. *Journal of Geotechnical and Geoenvironmental Engineering*. 2005 Oct;131(10):1189-98.
- [11] Chegenizadeh, A. and H. Nikraz, (2011). "Study on modulus of elasticity of reinforced clay" - *Advanced Materials Research*. 243-249: pp. 5885-5889, 2011.
- [12] Ichikawa Y, Kawamura K, Theramast N, Kitayama K. Secondary and tertiary consolidation of bentonite clay: consolidation test, molecular dynamics simulation and multiscale homogenization analysis. *Mechanics of Materials*. 2004 May 1;36(5-6):487-513.
- [13] Chegenizadeh, A. and H. Nikraz, (2011). Composite Soil: Fiber Inclusion and Strength, *Journal of Advanced Materials Research* 1646
- [14] Kenney TC, Veen WV, Swallow MA, Sungaila MA. Hydraulic conductivity of compacted bentonite-sand mixtures. *Canadian Geotechnical Journal*. 1992 Jun 1;29(3):364-74.
- [15] Chegenizadeh, A. and H. Nikraz, (2012). Composite Clayey Sand and Short Fiber, *Advanced Materials Research* 383, 2764-2769
- [16] Bohnhoff GL, Shackelford CD. Consolidation behavior of polymerized bentonite-amended backfills. *Journal of Geotechnical and Geoenvironmental Engineering*. 2014 May 1;140(5):04013055.
- [17] Chegenizadeh, A., Keramatikerman, M., & Nikraz, H. (2018). Liquefaction resistance of fibre reinforced low-plasticity silt. *Soil Dynamics and Earthquake Engineering*, 104, 372-377.
- [18] Ameta NK, Wayal AS. Effect of bentonite on permeability of dune sand. *Ejge*. 2008 Jan;13:1-7.
- [19] Chegenizadeh A, Keramatikerman M, Panizza S, Nikraz H. (2017). Effect of powdered recycled tire on sulfate resistance of cemented clay. *Journal of Materials in Civil Engineering*. 2017 Oct 1;29(10):04017160.
- [20] Horpibulsuk S, Yangsukkaseam N, Chinkulkijniwat A, Du YJ. Compressibility and permeability of Bangkok clay compared with kaolinite and bentonite. *Applied Clay Science*. 2011 Apr 1;52(1-2):150-9.
- [21] Chegenizadeh, A., Keramatikerman, M., Dalla Santa, G., & Nikraz, H. (2018). Influence of recycled tyre amendment on the mechanical behaviour of soil-bentonite cut-off walls. *Journal of cleaner production*, 177, 507-515
- [22] Baxter DY. *Mechanical behavior of soil-bentonite cutoff walls* (Doctoral dissertation, Virginia Tech).
- [23] Amiralian S, Chegenizadeh A, Nikraz H (2012) Laboratory investigation on the compaction properties of lime and fly ash composite, *Proceedings of the International Conference on Civil and Architectural applications (ICCAA'2012)* 79-83
- [24] Loginov M, Citeau M, Lebovka N, Vorobiev E. Evaluation of low-pressure compressibility and permeability of bentonite sediment from centrifugal consolidation data. *Separation and purification technology*. 2012 May 18;92:168-73.
- [25] Amiralian S, Chegenizadeh A, Nikraz H (2012) Laboratory investigation on the effect of lime on compressibility of soil, *Proceedings of the International Conference on Civil and Architectural applications (ICCAA'2012)* 89-93
- [26] Katsumi T, Ishimori H, Onikata M, Fukagawa R. Long-term barrier performance of modified bentonite materials against sodium and calcium permeant solutions. *Geotextiles and Geomembranes*. 2008 Feb 1;26(1):14-30.
- [27] Keramatikerman, M., Chegenizadeh, A., Yilmaz, Y., & Nikraz, H. (2018). Effect of Lime Treatment on Static Liquefaction Behavior of Sand-Bentonite Mixtures. *Journal of Materials in Civil Engineering*, 30(11), 06018017.
- [28] O'REILLY MP, New BM. Settlements above tunnels in the United Kingdom-their magnitude and prediction. 1982.
- [29] Chegenizadeh, A., & Keramatikerman, M. (2017). *Mitigating sulphate attacks in geotechnical engineering* Hauppauge, New York, USA Nova Science Publishers. (pp. 1-165).
- [30] ÖNAL M, Sarikaya Y, ALEMDAROĞLU T, BOZDOĞAN İ. Isolation and characterization of a smectite as a micro-mesoporous material from a bentonite. *Turkish Journal of Chemistry*. 2003 Dec 26;27(6):683-94.
- [31] Chegenizadeh, A., Keramatikerman, M., Miceli, S., Nikraz, H., Salih Sabbar, A. (2020). Investigation on Recycled Sawdust in Controlling Sulphate Attack in Cemented Clay. *Appl. Sci.*, 10, 1441.
- [32] Baxter DY. *Mechanical behavior of soil-bentonite cutoff walls* (Doctoral dissertation, Virginia Tech).
- [33] Keramatikerman, M., Chegenizadeh, A., & Nikraz, H. (2017). An investigation into effect of sawdust treatment on permeability and compressibility of soil-bentonite slurry cut-off wall. *Journal of Cleaner Production*, 162, 1-6.
- [34] Bergado DT, Ruenkraierrgsa T, Taesiri Y, Balasubramaniam AS. Deep soil mixing used to reduce embankment settlement. *Proceedings of the Institution of Civil Engineers-Ground Improvement*. 1999 Oct;3(4):145-62.
- [35] Keramatikerman M, Chegenizadeh A, Terzaghi S. (2019) Review on Effect of Sugarcane Bagasse Ash as an Additive in Construction Industry. 2019. *EJGE*. Vol.24 Bun. 02.
- [36] King A, Raffle JF. Studies on the settlement of hydrating cement suspensions. *Journal of Physics D: Applied Physics*. 1976 Jul 11;9(10):1425



- [37] Chegenizadeh, A., Keramatikerman, M., & Nikraz, H. (2016). Flexible pavement modelling using Kenlayer. *EJGE*, 21, 2467-2479.
- [38] Feng TW, Lee JY, Lee YJ. Consolidation behavior of a soft mud treated with small cement content. *Engineering geology*. 2001 Apr 1;59(3-4):327-35.
- [39] Keramatikerman, M., Chegenizadeh, A., & Pu, H. (2017). Effect of atrazine contamination on compressibility and permeability characteristics of clay. *Geotechnical Testing Journal*, 40(6), 936-950.
- [40] Al-Rkaby AHJ, Chegenizadeh A, Nikraz H. (2017). Anisotropic strength of large scale geogrid-reinforced sand:experimental study *Soils and foundations* 57 (4), 557-574
- [41] Walker G. The early development of the cement apparatus in the barnacle, *Balanus balanoides* (L.)(Crustacea: Cirripedia). *Journal of experimental marine Biology and Ecology*. 1973 Sep 1;12(3):305-14.
- [42] Mikhail, M., Chegenizadeh, A., Keramatikerman, M., Burns, G., Terzaghi, S., Nikraz, H. (2020). Application of Cane Ash on Compressive Strength of Soil Uncovered to MgSO<sub>4</sub>. *International Journal of Engineering and Advanced Technology (IJEAT)* 9(4).
- [43] Okano KE, Shimizu KA, Satuito C, Fusetani NO. Visualization of cement exocytosis in the cypris cement gland of the barnacle *Megabalanus rosa*. *Journal of experimental biology*. 1996 Oct 1;199(10):2131-7
- [44] Chegenizadeh A, Aashish M, Nikraz H, Keramatikerman M. Sulphate Attack on Cemented-Bentonite-Coconut Coir. *Results in Engineering*. 2020 Mar 3:100111.
- [45] Srivastava A, Pandey S, Rana J. Use of shredded tyre waste in improving the geotechnical properties of expansive black cotton soil. *Geomechanics and Geoengineering*. 2014 Oct 2;9(4):303-11.
- [46] Keramatikerman M, Chegenizadeh A, Nikraz H. Effect of Slag on Restoration Mechanical Characteristics of Ethanol Gasoline-Contaminated Clay. *Journal of Environmental Engineering*. 2018 Jul 1;144(7):06018001.
- [47] Srivastava A, Pandey S, Rana J. Use of shredded tyre waste in improving the geotechnical properties of expansive black cotton soil. *Geomechanics and Geoengineering*. 2014 Oct 2;9(4):303-11.
- [48] Keramatikerman M, Chegenizadeh A, Nikraz H. Shear strength characteristics of over-consolidated clay treated with ggbfs. *Australian Geomechanics Journal*. 2018;53(2):141-9.
- [49] Oikonomou N, Mavridou S. The use of waste tyre rubber in civil engineering works. In *Sustainability of construction materials* 2009 Jan 1 (pp. 213-238). Woodhead Publishing.
- [50] Keramatikerman, M. (2018). *Investigations into Effect of By-product Binders in Improvement of Cyclic Behaviour of Soil* (Doctoral dissertation, Curtin University).
- [51] Stasiak M, Molenda M, Bańda M, Gondek E. Mechanical properties of sawdust and woodchips. *Fuel*. 2015 Nov 1;159:900-8.
- [52] Keramatikerman, M., Chegenizadeh, A., Nikraz, H. How Ground Improvement Addresses the United Nation Sustainable Development Goals: A Review. *Current Trends in Civil & Structural Engineering* 5(3): 2020. CTCSE.MS.ID.000613. DOI: 10.33552/CTCSE.2020.05.000613
- [53] Barrientos V, Delgado J, Navarro V, Juncosa R, Falcón I, Vázquez A. Characterization and geochemical-geotechnical properties of granite sawdust produced by the dimension stone industry of O Porriño (Pontevedra, Spain). Geological Society of London.
- [54] Mikhail, M., Keramatikerman, M., Chegenizadeh, A., Terzaghi, S., Burns, G., Nikraz, H. (2020). Influence of Bagasse Ash on Compaction Behaviour of Soil. *International Journal of Innovative Technology and Exploring Engineering (IJITEE)*. 9(5).
- [55] Salehi M, Sivakugan N. Effects of lime-clay modification on the consolidation behavior of the dredged mud. *Journal of waterway, port, coastal, and ocean engineering*. 2009 Nov;135(6):251-8.
- [56] Keramatikerman M, Chegenizadeh A. Effect of particle shape on monotonic liquefaction: Natural and crushed sand. *Experimental Mechanics*. 2017 Oct 1;57(8):1341-8.
- [57] Manikandan AT, Moganraj M. Consolidation and rebound characteristics of expansive soil by using lime and bagasse ash. *International Journal of Research in Engineering and Technology*. 2014 Apr;3(4):403-11.
- [58] Keramatikerman M, Chegenizadeh A, Nikraz H. STRENGTH OF CEMENTED FLY ASH SOIL. *International Journal of Engineering Applied Sciences and Technology (IJEAST)*, 2020 (accepted).
- [59] Moghal AA, Sivapullaiiah PV. Effect of pozzolanic reactivity on compressibility characteristics of stabilised low lime fly ashes. *Geotechnical and geological engineering*. 2011 Sep 1;29(5):665-73.
- [60] Keramatikerman M, Chegenizadeh A, Nikraz H. EFFECT OF BENTONITE DOSAGE ON SHEAR BEHAVIOUR OF SAND-FLY ASH. *International Journal of Engineering Applied Sciences and Technology (IJEAST)*, 2020 (accepted).
- [61] Chong SY, Kassim KA. Consolidation characteristics of lime column and Geotextile Encapsulated Lime Column (GELC) stabilized pontian marine clay. *Electron. J. Geotech. Eng. A*. 2014;19:129-41.
- [62] Chegenizadeh, A., Keramatikerman, M., Nikraz, H., Importance of Microstructural Analysis in Experimental Soil Stabilization. *Global Journal of Engineering Science*. 4(5): 2020.
- [63] Bras A, Henriques FM. Natural hydraulic lime based grouts-The selection of grout injection parameters for masonry consolidation. *Construction and Building Materials*. 2012 Jan 1;26(1):135-44.



- [64] Keramatikerman M, Chegenizadeh A, Nikraz H. Effect of sawdust on Cohesion of Sand-Sawdust mixture. *International Journal of Engineering Applied Sciences and Technology (IJEAST)*, 2020 (accepted).
- [65] Ouhadi, V. R., Yong, R. N., Amiri, M., & Ouhadi, M. H. (2014). Pozzolanic consolidation of stabilized soft clays. *Applied Clay Science*, 95, 111-118.
- [66] Chegenizadeh, A., Keramatikerman, M., & Nikraz, H. (2017). A Study on Numerical Modelling of Rigid Pavement: Temperature and Thickness Effect. *International Journal of Civil and Environmental Engineering*, 10(2), 265-269.