



# IJEAST

INTERNATIONAL JOURNAL  
OF ENGINEERING APPLIED SCIENCE  
AND TECHNOLOGY



**VOLUME : 4    ISSUE : 05    Print / Issue Publication Date: 09-Nov-2019**



**ISSN : 2455-2143**



**DOI : 10.33564/IJEAST.2019.v04i05.014**

Indexed In



[WWW.IJEAST.COM](http://WWW.IJEAST.COM)

[editor@ijeast.com](mailto:editor@ijeast.com)

# ON THE ANALYSIS OF NAVIER SLIP AND NEWTONIAN HEATING ON STEADY MAGNETOHYDRODYNAMIC REACTING CONVECTIVE FLUID FLOW OVER A VERTICAL PLATE

Oluwakuade Gbenga, Jacob  
Department of Mathematical Sciences  
Federal University of Technology  
Akure, Ondo State, Nigeria.

Omowaye Adeola, John  
Department of Mathematical Sciences  
Federal University of Technology  
Akure, Ondo State, Nigeria.

Koriko Olubode, Kolade  
Department of Mathematical Sciences  
Federal University of Technology  
Akure, Ondo State, Nigeria.

**Abstract—** Effects of Navier Slip and Newtonian Heating on steady magnetohydrodynamic reacting convective flow over a vertical surface are considered in this paper. Similarity transformation technique is applied to transform the partial differential equations to coupled non-linear ordinary differential equations corresponding to momentum and energy equations. The corresponding coupled non-linear ordinary differential equations are solved numerically using shooting method along with fourth-order Runge-Kutta scheme. The results are presented in tables and graphs. The velocity and temperature of the flow increase with an increase in both local slip parameter and local Biot number.

**Keywords—** Navier slip, Newtonian heating, Steady, Magnetohydrodynamic, Convective flow, Biot number.

## I. INTRODUCTION

The field of magnetohydrodynamics has caught the attention and interest of many scholars and researchers in Science, Engineering and Medicine ever since its discovery in 1918. Its practical applications are found in the design of fusion reactors, dispersion of metals, metallurgy, MHD pumps, MHD generator, MHD flow meter etc. So many reviews on this area of interest have been made by many researchers such as Makinde (2011) who studied the combined effects of Navier slip and Newtonian heating on an unsteady hydromagnetic boundary layer stagnation point flow towards a flat plate in the presence of magnetic field. It was observed in his result that the thermal boundary layer thickens with a rise in the flow unsteadiness and as Newtonian heating intensifies, while the local skin friction and the rate of heat transfer at the plate surface change significantly due to the slip parameter. Bhattacharyya Mukhopahyay, and Layek (2011) studied magnetohydrodynamic (MHD) boundary layer flow and heat transfer over a flat plate with slip condition at the boundary. They centered their study on steady two-dimensional laminar

flow of an electrically conducting viscous incompressible fluid and heat transfer over a flat plate in the presence of transverse magnetic field. Their result showed that the increase of magnetic and slip parameters reduces the boundary layer thickness and also enhances the heat transfer from the plate. The effects of Arrhenius kinetics on hydromagnetic free convective flow of an electrically conducting fluid past a vertical stretching sheet kept at constant temperature with viscous dissipation was studied by Omowaye and Koriko (2014). In their findings, it was shown that the velocity and temperature increase as local Eckert number increases. In a recent research, Hafidzuddin, Nazar, Arifin, and (2015) examined steady laminar boundary layer flow and heat transfer over a permeable exponentially stretching or shrinking sheet with generalized slip velocity. Their findings revealed that the introduction of generalized slip boundary condition resulted in the reduction of the local skin friction coefficient and local Nusselt number. The effects of magnetic field, thermal radiation and viscous dissipation on transient magnetohydrodynamic (MHD) flow of non-Newtonian incompressible fluid obeying EyringPowell model in a porous medium was studied by Oyelami and Dada (2016). The results obtained showed that a rise in thermal Grashof number ( $Gr$ ) and modified Grashof number ( $Gm$ ) caused velocity to increase whereas velocity decreases with increase in Prandtl number ( $Pr$ ). Also that an increase in Prandtl number ( $Pr$ ) and magnetic parameter ( $M$ ) causes an increase in temperature.

Arshad, Ilyas, and Sharidan (2015) considered the effects of Newtonian heating and mass transfer on magnetohydrodynamic (MHD) free convection flow over a vertical plate that applies arbitrary shear stress to the fluid. Their findings showed that increase in the magnetic term causes a velocity reduction and an increase in the Newtonian heating causes an increase in velocity. Ramzan, Farooq, Alsaed, and Hayat, (2013) in their investigation studied the effects of Newtonian heating on the magnetohydrodynamic (MHD) three-dimensional flow past a stretching surface. It was discovered that temperature profile

increases with an increase in the Eckert number ( $Ec$ ). Winifred and Makinde (2013) studied combined effects of Buoyancy force and Navier slip on MHD flow of a nanofluid over a convectively heated vertical porous plate. They considered steady laminar incompressible two-dimensional MHD boundary layer flow of an electrically conducting water-based nanofluid past a convectively heated porous vertical semi-infinite flat plate under combined effects of buoyancy forces and Navier slip. It was found that (i) the fluid velocity increases with increase in the slip parameter, (ii) Magnetic parameter causes a decrease in the fluid velocity, (iii) Grashof and Eckert numbers cause a decrease in the velocity profile, and (iv) increase in the intensity of Newtonian heating and Eckert number causes an increase in the temperature of the fluid. In a recent research carried out by Fagbade Falodun, Omowaye (2018) on MHD natural convection flow of viscoelastic fluid over an accelerating permeable surface with thermal radiation and heat source or sink, it was revealed that an increase in the parameter of the flow produces significant increase in the fluid temperature.

Yahaya (2016) studied steady MHD boundary-layer slip flow and heat transfer of nanofluid over a convectively heated non-linear permeable sheet. A two-dimensional steady boundary layer flow of nanofluid over a non-linear permeable stretching sheet with partial slip was considered. With some necessary assumptions, the coupled non-linear higher order ordinary differential equations obtained were solved, the results of which revealed that increase in Biot number increases the dimensionless temperature profile. Recently, Makinde and Animasaun (2016) considered the effects of magnetic field, nonlinear thermal radiation and homogeneous-heterogeneous quartic autocatalysis chemical reaction on an electrically conducting alumina-water nanofluid containing gyrotactic microorganism over an upper horizontal surface of a paraboloid revolution. They considered a steady two-dimensional 36nm spherical alumina-water nanofluid flow past an upper horizontal surface of a paraboloid revolution. Necessary assumptions were made. The transformed governing equations were solved numerically using Runge-Kutta fourth order method along with shooting technique and it was discovered that local heat transfer rate was smaller at high values of temperature parameter. Rushikumar and Gangadhar (2012) studied the influence of the heat and mass transfer characteristics of a two-dimensional steady laminar free convective flow of a viscous incompressible fluid between two parallel porous walls. The dimensionless governing equations gotten were solved numerically using the fourth-order Runge-Kutta method with shooting technique. It was found that velocity component decreases with an increase of magnetic field parameter ( $M$ ) and the Prandtl number ( $Pr$ ). Also, it was discovered that an increase in Grashof number ( $Gr$ ) causes an increase in the velocity profile and that temperature component increases with an increase in Magnetic parameter.

Anuradha and Priyadarshini (2014) studied unsteady free convective MHD flow of a viscous fluid past a semi-infinite vertically moving porous plate embedded in a porous medium. Makinde and Ibrahim (2015) investigated the MHD chemically reacting viscous fluid flow towards a vertical surface with slip and convective boundary condition. It was established that (i) the magnetic field strength increases the flow of fluid towards the surface, (ii) the Grashof number has positive influence on the flow field, and (iii) the rate of heat transfer diminishes with

increasing Grashof, magnetic and Prandtl numbers. Chand and Jat (2014) studied the effects of viscous dissipation and radiation on steady flow of electrically conducting fluid through a porous stretching surface. The expressions of the velocity and temperature were found with classical Runge-kutta fourth-order scheme. Mathews and Hills (2008) investigated numerically the effect of slip on momentum boundary layer thickness on a flat plate. The combined effects of Hall current and wall slip on steady MHD flow of a visco-elastic fluid past an infinite vertical porous plate through a porous medium was investigated by Kumar and Chand (2011).

The main goal of this work is to determine the combined effects of Navier slip and Newtonian heating on steady magnetohydrodynamic reacting convective flow over a vertical surface. Subsequently, the governing partial differential equations of the flow are transformed into ordinary differential equations using appropriate similarity variables which are later solved numerically using the shooting method along with fourth order Runge-Kutta scheme. Conclusively, the results are presented in tables and graphs. The discussion of which is accompanied with some concluding remarks.

## II. MATHEMATICAL MODEL

We consider a steady two-dimensional flow of a viscous incompressible flowing along a vertical plate at constant temperature under Arrhenius kinetics. As indicated in figure 1 below. We assumed that: (i) the flow is in the  $x$  direction along the plate to which the  $y$  axis is perpendicular. (ii) a uniform strong magnetic field  $\beta_0$  is applied normal to the flow. (iii) the flow is not influenced by any external field due to polarization of charges and Hall effect; hence, the electrical field is considered to be negligible although there is heat generation due to viscous dissipation. Also, the assumption of no slip condition on the flow is not valid rather the flow is under the influence of Navier slip and Newtonian heating.

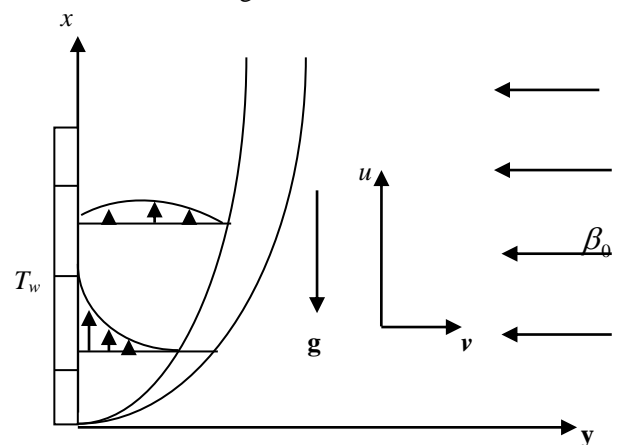


Figure 1. The schematic diagram of the flow

Taking into consideration the Boussinesq's approximation, the equations governing the flow corresponding to continuity, momentum and energy respectively are written as follows:



$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (1) \quad \text{Frank Kamenetskii parameter: } \delta = \frac{AQ}{U_\infty^3 \rho} e^{-\frac{E}{RT_\infty}},$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = \frac{\mu}{\rho} \frac{\partial^2 u}{\partial y^2} + g \beta (T - T_\infty) - \sigma \frac{\beta_0^2}{\rho} u \quad (2) \quad \text{Activation energy parameter: } \varepsilon = \frac{RT_\infty}{E}$$

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \frac{k}{\rho c_p} \frac{\partial^2 T}{\partial y^2} + \frac{\mu}{\rho c_p} \left( \frac{\partial u}{\partial y} \right)^2 + \sigma \frac{\beta_0^2 u^2}{\rho c_p} + \frac{AQ e^{-\frac{E}{RT}}}{\rho c_p} \quad (3) \quad \text{Local Biot number: } Bi_x = -\frac{h}{k} \sqrt{\frac{\nu x}{U_\infty}}$$

$$\alpha = \frac{\varepsilon T_\infty}{(T_w - T_\infty)},$$

$$\text{Local slip parameter: } D = \beta \sqrt{\frac{\nu}{\nu x}}$$

with these boundary conditions:

$$u(x,0) = \beta \frac{\partial u}{\partial y}(x,0); \quad v(x,0) = 0 \quad (4)$$

$$-k \frac{\partial T}{\partial y}(x,0) = h[T - T_w(x,0)], \quad u(x,\infty) = U_\infty;$$

$$T(x,\infty) = T_\infty \quad (5)$$

The following dimensionless variables are introduced.

The stream function  $\psi(x, y)$  defined by

$$u = \frac{\partial \psi}{\partial y}; \quad v = -\frac{\partial \psi}{\partial x}$$

(6)

The similarity variable:

$$\eta = y \sqrt{\frac{U_\infty}{\nu x}} \quad \text{and} \quad \psi = \sqrt{\nu x U_\infty} f(\eta); \quad (7)$$

The dimensionless temperature:

$$\theta(\eta) = \frac{T - T_\infty}{T_w - T_\infty} \quad (8)$$

Equation (6) automatically satisfies the continuity equation (1). Substituting equations (6) - (8) into equations (2) - (5) and simplifying gives

$$f''' + \frac{1}{2} f f'' - M_x f' + Gr_x \theta = 0 \quad (9)$$

$$\theta'' + \frac{1}{2} Pr f \theta' + Pr Ec (f'')^2 + Pr M_x Ec_x (f')^2 + \left. \begin{aligned} &Pr Ec_x \delta e^{\frac{\theta}{\alpha + \theta}} = 0 \\ &f'(0) = D f'''(0), f(0) = 0, f'(\infty) = 1 \\ &\theta'(0) = Bi_x (\theta(0) - 1), \theta(\infty) = 0 \end{aligned} \right\} \quad (10)$$

$$f'(0) = D f'''(0), f(0) = 0, f'(\infty) = 1 \quad (11)$$

$$\theta'(0) = Bi_x (\theta(0) - 1), \theta(\infty) = 0 \quad (12)$$

where: Magnetic parameter:  $M = \frac{\sigma \beta_0^2}{\rho U_\infty}$ ,

Local Magnetic parameter:  $M_x = \frac{\sigma \beta_0^2}{\rho U_\infty} x$ ,

Eckert number:  $Ec = \frac{U_\infty^2}{(T_w - T_\infty) c_p}$ ,

Local Eckert number:  $Ec_x = \frac{U_\infty^2 x}{(T_w - T_\infty) c_p}$ ,

Local Grashof number:  $Gr_x = \frac{g \beta (T_w - T_\infty)}{U_\infty^2} x$ ,

Prandtl number:  $Pr = \frac{\mu c_p}{k}$ ,

(in this work,  $\alpha = 1$ )

### III. NUMERICAL COMPUTATIONS

Parameters		Makinde and Olanrewaju (2010)			Present work	
$Bi_x$	$Gr_x$	$Pr$	$f''(0)$	$-\theta'(0)$	$f''(0)$	$-\theta'(0)$
0.10	0.10	0.72	0.36881	0.07507	0.3688155165	0.0750771620
1.00	0.10	0.72	0.44036	0.23750	0.4403655505	0.2375063513
10.00	0.10	0.72	0.46792	0.30559	0.4679281119	0.3055966349
0.10	0.50	0.72	0.49702	0.07613	0.4970221547	0.0761377481
0.10	1.00	0.72	0.63200	0.07704	0.6320070939	0.0770444866
0.10	0.10	3.00	0.34939	0.08304	0.3493973478	0.0830459872
0.10	0.10	7.10	0.34270	0.08672	0.3427051907	0.0867211669

The set of nonlinear coupled ordinary differential equations (9) and (10) governing the flow of the fluid under the boundary conditions (11) and (12) are numerically solved using Runge-Kutta fourth order scheme alongside with shooting method. The step size of 0.01 is used for the numerical computation with 10-place decimal accuracy as the criterion of convergence. The results are presented in tables and figures. Verifying the accuracy of this present work, a direct comparison of the result obtained is done with the result obtained by Makinde and Olanrewaju [10] and this is shown in table 1.

Table 1: Computations showing comparisons of values of  $-\theta'(0)$  and  $C_f$  for  $Bi_x$ ,  $Gr_x$  and  $Pr$  when

$$M = Ec = Ec_x = \varepsilon = \delta = D = 0.$$

### IV. RESULTS AND DISCUSSIONS

The problem of Navier slip and Newtonian heating on steady magnetohydrodynamic reacting convective flow over a vertical plate has been carried out in this work. Numerical computations for the nonlinear coupled ordinary differential equations governing the flow for different values of the parameters employing the numerical method were discussed in section III. In this section, discussions on the effects of the controlling parameters on the flow are presented. Meanwhile, all through the computations, the various parameters controlling the flow such as Eckert number ( $Ec$ ), local Eckert number ( $Ec_x$ ), Magnetic parameter ( $M$ ), local Biot number ( $Bi_x$ ), Slip parameter ( $D$ ), among others, were varied at intervals for both velocity and temperature profiles. Figure 2 shows the velocity profiles for various values of local Grashof number ( $Gr_x$ ). An increase in ( $Gr_x$ ) causes the velocity to increase which shows that buoyancy force assists the flow and

this is in agreement with what Omowaye and Koriko (2014) obtained. Figure 3 shows the influence of magnetic parameter on the velocity distribution. The application of magnetic field to an electrically conducting fluid gives rise to a force called Lorentz force (*resistance force*) that causes retardation in the motion of the fluid hence reducing the velocity. The retarding force (*Lorentz force*) can be used to control the velocity of the flow. The influence of dissipation parameter,  $Ec$ , on the velocity profiles is presented in figure 4. It is observed that increase in Eckert number ( $Ec$ ) encourages heat storage which in turn increases the kinetic energy of the fluid molecules; the effect of which causes an increase in the velocity of the fluid. Figure 5 illustrates the effect of Prandtl number ( $Pr$ ) on the temperature profiles. It is observed that increase in  $Pr$  causes a decrease in temperature of the fluid. This is so because small value of Prandtl number ( $Pr$ ) increases the thermal conductivity of the fluid. Hence, the larger the Prandtl number ( $Pr$ ), the lesser the thermal conductivity of the fluid becomes. The effect of Eckert number ( $Ec$ ) on the temperature profile is shown in figure 6. It is noticed that as Eckert number ( $Ec$ ) increases, the temperature increases. With the increase in Eckert number, heat energy is stored in the fluid due to the frictional drag. This is also in agreement with what Ramzan *et al.* [7] obtained. The influence of Magnetic field parameter ( $M$ ) on temperature is shown in figure 7. It is observed that as the magnetic parameter increases so is the temperature of the fluid on the increase. Increase in  $M$  causes the temperature of the fluid to increase because the introduction of magnetic field to an electrically conducting fluid will give rise to Lorentz force which will oppose the motion of the fluid. Hence, the kinetic energy of the molecules of the fluid will be converted to heat energy in an irreversible process of viscous dissipation and this will give rise to temperature increase. Figure 8 shows that increase in Prandtl number ( $Pr$ ) causes a decrease in the velocity of the flow. The increase in the Prandtl number is responsible for increase in the viscosity of the fluid which in turn opposes the motion of the fluid. Figure 9 shows that as the slip parameter ( $D$ ) increases, so does the fluid velocity. This is because due to the slip condition at the plate, the velocity of the fluid adjacent to the plate permits more fluid to slip past the surface; hence, the flow accelerates for distances close to the surface. This is consistent with the fact that higher  $D$  means an increase in lubrication and slipperiness of the surface. In figure 10, the effect of slip parameter is illustrated on temperature. It is observed that an increase in the slip parameter causes a decrease in the temperature profiles of the flow. The presence of slip condition on the surface enables more fluid to flow past it. Hence, fluid molecules move more freely and there will be less viscous dissipation which can give rise to temperature rise. In figure 11, it is observed that an increase in the Newtonian heating parameter ( $Bi_x$ ) increases the fluid velocity. This is because the local Biot number ( $Bi_x$ ) enhances heat conduction resistance in the solid body. Hence, heat convection takes place between the body and the fluid. The transferred heat weakens the cohesive forces among the fluid's molecules and this allows them to move faster. Figure 12 shows that an increase in the Newtonian heating causes a temperature rise in the fluid. Biot number increases thermal conductivity of the fluid which will enable the fluid to absorb

more heat from the plate and this in turn will increase the temperature of the fluid.

### V. GRAPHS

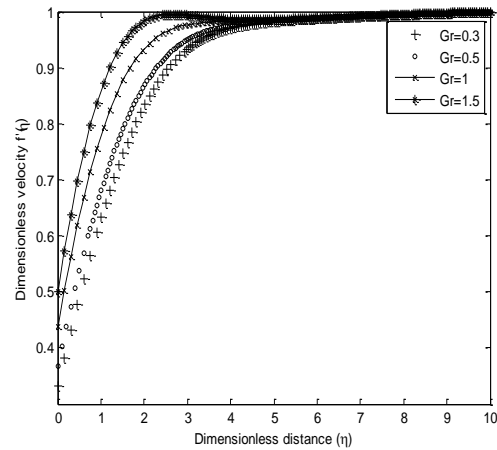


Figure 2: Velocity profiles at varied  $Gr_x$  when  $Pr = 0.72, M = Ec = Ec_x = 0.01, \varepsilon = 0.20, \delta = 0.03, D = 0.10, Bi_x = 0.10$

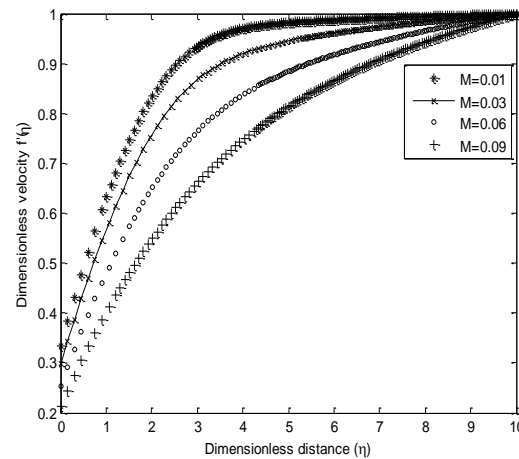


Figure 3: Velocity profiles at varied  $M$  when  $Pr = 0.72, Ec = Ec_x = 0.01, \varepsilon = 0.20, \delta = 0.03, D = 0.10, Bi_x = 0.10, Gr_x = 0.30$

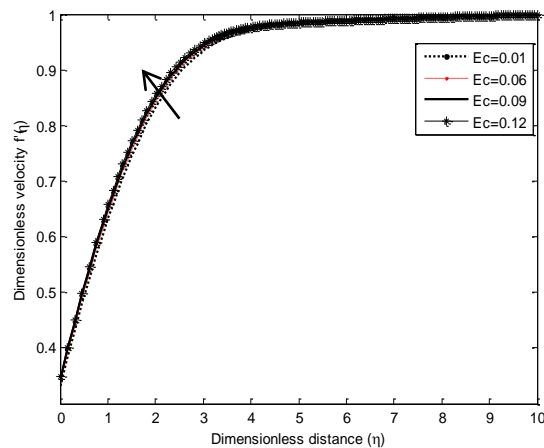


Figure 4: Velocity profiles at varied  $Ec$  when  $Pr = 0.72, M = 0.01, \varepsilon = 0.20, \delta = 0.03, D = 0.10, Bi_x = 0.10, Gr_x = 0.30$

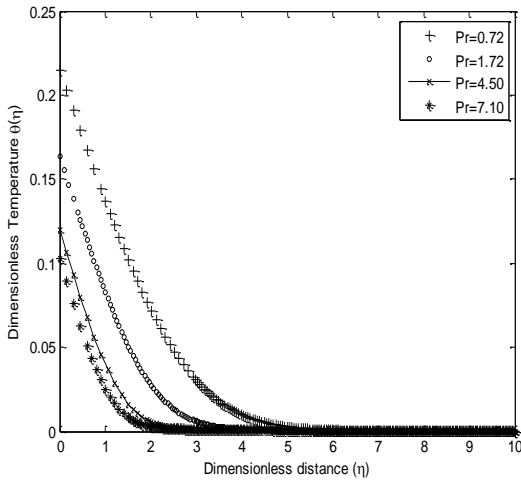


Figure 5: Temperature profiles at varied  $Pr$  when  $M = Ec = Ec_x = 0.01, \varepsilon = 0.20, \delta = 0.03, D = 0.10, Bi_x = 0.10, Gr_x = 0.30$


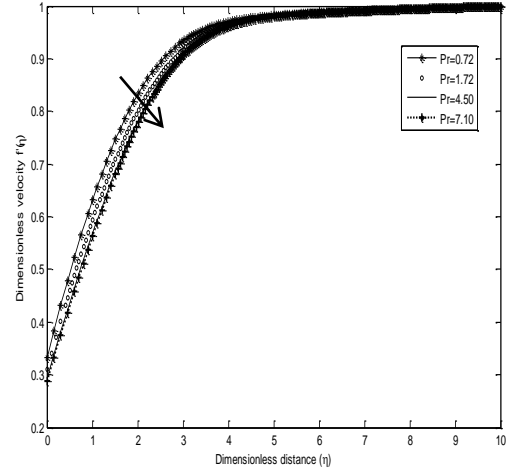


Figure 8: Velocity profiles at varied  $Pr$  when  $Gr_x = 0.30, M = Ec = Ec_x = 0.01, \varepsilon = 0.20, \delta = 0.03, D = 0.10, Bi_x = 0.10$

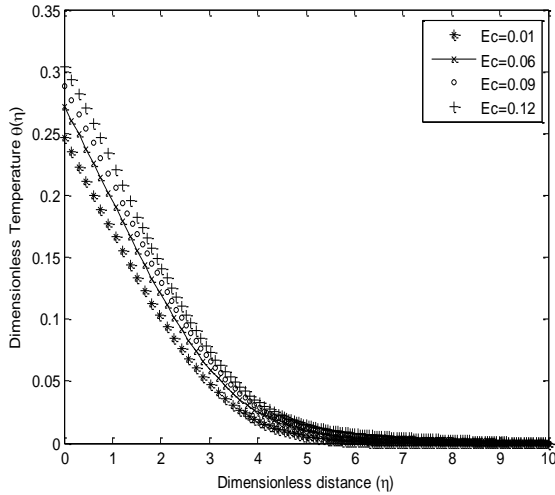

6: Temperature profiles at varied  $Ec$  when  $Pr = 0.72, M = 0.01, \varepsilon = 0.20, \delta = 0.03, D = 0.10, Bi_x = 0.10, Gr_x = 0.30$

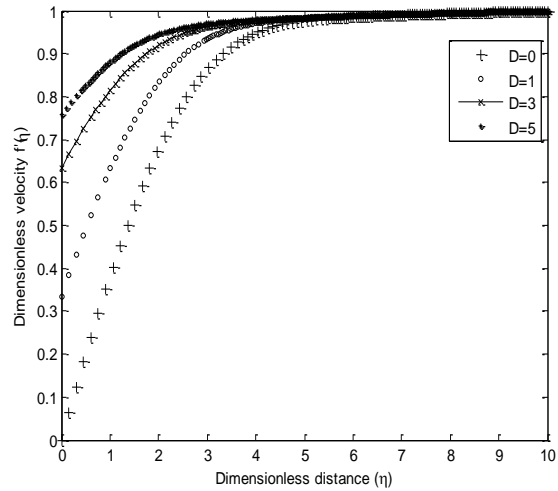


Figure 9: Velocity profiles at varied  $D$  when  $Gr_x = 0.30, M = Ec = Ec_x = 0.01, \varepsilon = 0.20, \delta = 0.03, Pr = 0.72, Bi_x = 0.10$

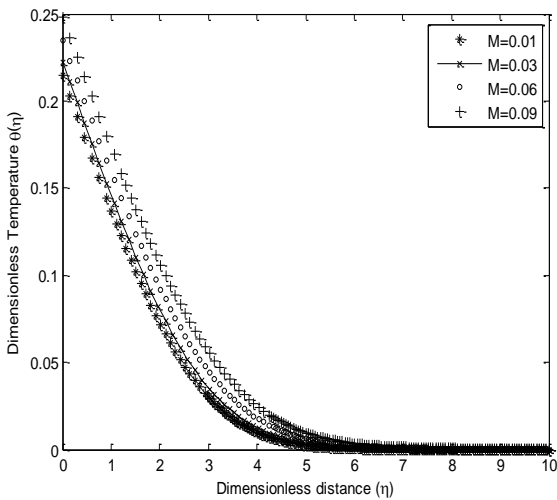


Figure 7: Temperature profiles at varied  $M$  when  $Pr = 0.72, Ec = Ec_x = 0.01, \varepsilon = 0.20, \delta = 0.03, D = 0.10, Bi_x = 0.10, Gr_x = 0.30$

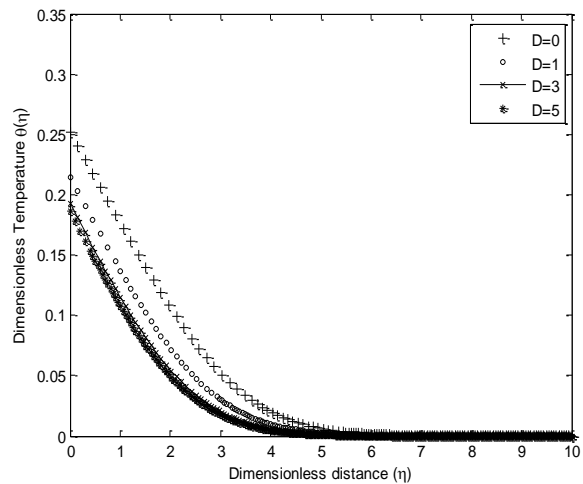


Figure 10: Temperature profiles at varied  $D$  when  $Gr_x = 0.30, M = Ec = Ec_x = 0.01, \varepsilon = 0.20, \delta = 0.03, Pr = 0.72, Bi_x = 0.10$

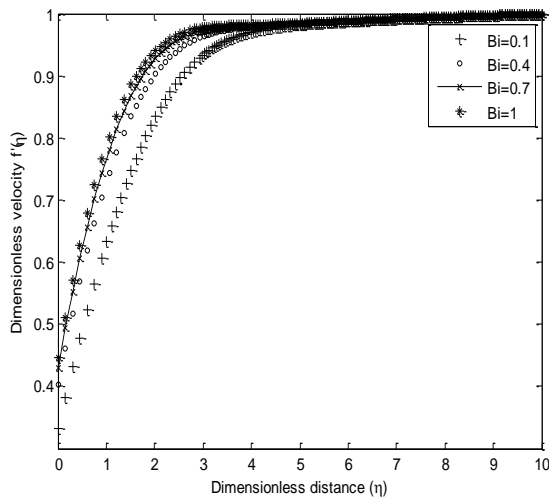


Figure 11: Velocity profiles at varied  $Bi_x$  when  $Gr_x = 0.30, M = Ec = Ec_x = 0.01, \varepsilon = 0.20, \delta = 0.03, D = 0.10, Pr = 0.72$

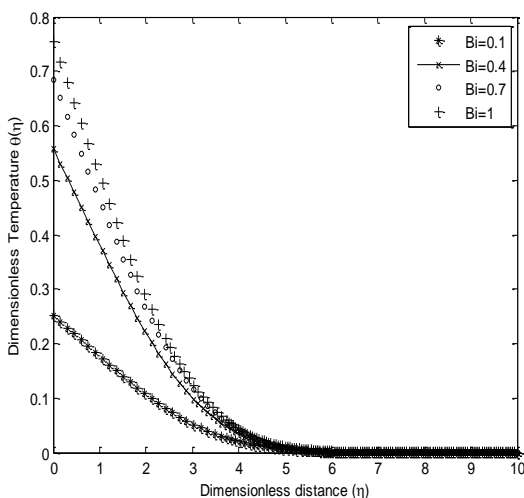


Figure 12: Temperature profiles at varied  $Bi_x$  when  $Gr_x = 0.30, M = Ec = Ec_x = 0.01, \varepsilon = 0.20, \delta = 0.03, D = 0.10, Pr = 0.72$

## VI. CONCLUSION

The effects of Navier slip and Newtonian heating on steady magnetohydrodynamic reacting convective flow over a vertical plate have been investigated. The concepts of Navier slip and Newtonian heating are examined and analyzed. The solutions of the coupled non-linear ordinary differential equations are computed using the fourth order Runge-Kutta scheme together with shooting method. The increasing effects of both the slip parameter and Biot number are felt as they both have increasing effects on both velocity and temperature of the fluid.

## VII. ACKNOWLEDGEMENT

The authors are thankful to the Department of Mathematical Sciences, The Federal University of Technology, Akure for providing facilities and enabling environment for carrying out

this work. We are also grateful to the anonymous reviewers of this work.

## VIII. REFERENCE

- [1] Makinde O. D. (2011), "Computational Modelling of MHD Unsteady Flow and Heat Transfer towards a Flat Plate with Navier Slip and Newtonian Heating," *Brazilian Journal of Chemical Engineering*. Vol. 29(01), (pp. 159-166).
- [2] Bhattacharyya, K., Mukhopahyay, S. and Layek, G. C. (2011) "MHD Boundary Layer Slip Flow and Heat Transfer Over a Flat Plate," *Chinese Physics Letters*. Vol. 28(2), (pp.143-152).
- [3] Omowaye A. J. and Koriko O. K. (2014) "Steady Arrhenius Laminar Free Convective MHD Flow and Heat Transfer past a Vertical Stretching Sheet with Viscous Dissipation," *Journal of the Nigerian Mathematical Society*, vol.33, (pp.259-271).
- [4] Hafidzuddin E. H., Nazar R., Arifin N. M. and Pop I. (2015) "Boundary Layer Flow and Heat Transfer over a Permeable Exponentially Stretching/Shrinking Sheet with Generalised Slip Velocity," *Journal of Applied Fluid Mechanics*, vol.9(4), (pp.2025-2036).
- [5] Oyelami H. and Dada V (2016) "Transient Magnetohydrodynamic Flow of EyringPowell Fluid in a Porous Medium", *Ife Journal of Science*, vol.18(2), (pp. 463-472).
- [6] Arshad K., Ilyas K., and Sharidan S. (2015) "Effects of Newtonian Heating and Mass Diffusion on MHD Free Convection Flow Over Vertical Plate with Shear Stress at the Wall," *Jurnal Teknologi*. Vol.78(3), (pp.71-75).
- [7] Ramzan M., Farooq M., Alsaed A., and Hayat T. (2013) "MHD Three-dimensional Flow of Couple Stress Fluid with Newtonian Heating", *The European Physical Journal Plus*, vol.128, (pp.49-56).
- [8] Winifred M., and Makinde O. D. (2013), "Combined Effect of Bouyancy Force and Navier Slip on MHD Flow of a Nanofluid over a Convectively Heated Vertical Porous Plate", *The Scientific World Journal*, vol.1155(10), (pp.643-651).
- [9] Fagbade A. I., Falodun B. O., Omowaye A. J. (2018) "MHD Natural Convection flow of Viscoelastic Fluid over an Accelerating Permeable Surface with Thermal Radiation and Heat Source or Sink: Spectral Homotopy Approach", vol.9(4), (pp.1029-1041.)
- [10] Makinde O. D. and Olanrewaju P. O. (2010) "Buoyancy Effects on Thermal Boundary Layer Over a Vertical Plate with a Convective Surface Boundary Condition", *Journal of Fluids Engineering*, 132(1), (pp.5021-5024).
- [11] Yahaya S. D. (2016). "Steady MHD Boundary-Layer Slip Flow and Heat Transfer of Nanofluid over a Convectively Heated Non-Linear Permeable Sheet." *Journal of Advanced Mechanical Engineering*, vol.3(1), (pp.1-14).
- [12] Makinde O. D. and Animasaun I. L. (2016). "Bioconvection in MHD Nanofluid Flow with Nonlinear Radiation and Quartic Autocatalysis Chemical Reaction Past an Upper Surface of a Paraboloid of Revolution."



*International Journal of Thermal Sciences*, vol.109,  
(pp.159-171).

- [13] Rushikumar B. and Gangadhar K.. (2012). "MHD Free Convection Flow between Two Parallel Porous Walls with Varying Temperature." *International Journal of Engineering*, vol.3, (pp.67-72).
- [14] Anuradha S. and Priyadharshini P. (2014). "Heat and Mass Transfer on Unsteady MHD Free Convective Flow Past a Semi-Infinite Vertical Plate with Soret Effect." *The International Journal Of Science and Technology*, vol.19, (pp. 89-95).
- [15] Makinde O. D. and Ibrahim S. (2015). "MHD Chemically Reacting Viscous Fluid Flow towards a Vertical Surface with Slip and Convective Boundary Conditions." *International Journal of Mathematical, Computational, Physical, Electrical and Computer Engineering*, vol.9(10), (pp.593-599).
- [16] Chand G. and Jat R. N. (2014). "Viscous Dissipation and Radiation Effects on MHD Flow and Heat Transfer over an Unsteady Stretching Surface in Porous Medium." *Word Journal of Mechanics*, vol.5, (pp.151-164).
- [17] Matthews M. T. and Hill J. M. (2008). "A Note on the Boundary Layer Equations with Linear Slip Boundary Condition." *Applied Mathematics Letters*, vol.21, (pp.810-813).
- [18] Kumar R. and Chand K.. (2011). "Effects of Slip Conditions and Hall Current on Steady MHD Flow of a Viscoelastic Fluid past an Infinite Vertical Porous Plate through Porous Medium." *International Journal of Engineering Sciences and Technology*, vol.3(4), (pp.3123-3124).

# IJEAST

INTERNATIONAL JOURNAL  
OF ENGINEERING APPLIED SCIENCE  
AND TECHNOLOGY

## ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

## FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



### PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



### OPEN ACCESS

Free and unrestricted access to research for all.



### GLOBAL REACH

Connecting researchers and professionals worldwide.



### TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website  
[www.ijeast.com](http://www.ijeast.com)



INTERNATIONAL JOURNAL  
OF ENGINEERING APPLIED SCIENCE  
AND TECHNOLOGY

✉ [editor@ijeast.com](mailto:editor@ijeast.com)

🌐 [www.ijeast.com](http://www.ijeast.com)

📍 India



2455-2143