



# IJEAST

INTERNATIONAL JOURNAL  
OF ENGINEERING APPLIED SCIENCE  
AND TECHNOLOGY



**VOLUME : 1    ISSUE : 9    Print / Issue Publication Date: 09-Oct-2016**



**ISSN : 2455-2143**



Indexed In



[WWW.IJEAST.COM](http://WWW.IJEAST.COM)

[editor@ijeast.com](mailto:editor@ijeast.com)



# DESIGN REPORT OF A GO KART VEHICLE

Shaik Himam Saheb, RavSandeep Kumar Kona, Md. Hameed  
Assistant professor, Department of Mechanical Engineering  
Guru Nanak Institute of Technology,  
Hyderabad

**ABSTRACT** - This paper concentrates on explaining the design and engineering aspects of making a Go Kart for student karting championship 2015. This report explains objectives, assumptions and calculations made in designing a Go Kart. The team's primary objective is to design a safe and functional vehicle based on rigid and torsion free frame. The design is chosen such that the Kart is easy to fabricate in every possible aspect

## I. INTRODUCTION

We approached our design by considering all possible alternatives for a system and modeling them in CAD software SOLIDWORKS and subjected to analysis using ANSYS based on analysis result, the model was modified and retested and a final design was fixed. The design process of the vehicle is based on various engineering aspects depending upon

- **Safety and Ergonomics**
- **Market Availability**
- **Cost of the Components**
- **Safe Engineering Practices**

With this we had view of our Kart. We set up some parameters of our work and team has been divided into core groups.

- **Design**
- **Engine and Transmission**
- **Steering**
- **Brakes and wheels**
- **Business and Management**

## II. LITERATURE REVIEW

Being a new team we required a clear idea of basic requirements, parameters and design of Go Kart. We made a detailed study on Go Kart and visited Runway9, Hyderabad a Famous Go Karting Spot. We gained more knowledge during our field study and our basic doubts on dgn were cleared.

## III. DESIGN OF KART

The following design methodology was used during design:

- Requirements
- Design calculations and Analysis
- Considerations
- Testing
- Acceptance

## IV. MATERIAL SELECTION

IS1161 is selected for the chassis because of the following reasons

- Machinability
- Weld ability
- Availability


Properties Of IS1161 Seamless Tube

Properties	Metric
Ultimate tensile strength	415Mpa
Yield tensile strength	310Mpa
Poisson's ratio	0.3

## V. DIMENSIONAL SPECIFICATIONS

Round tube of dimension = 25.4mm OD

Thickness = 2mm

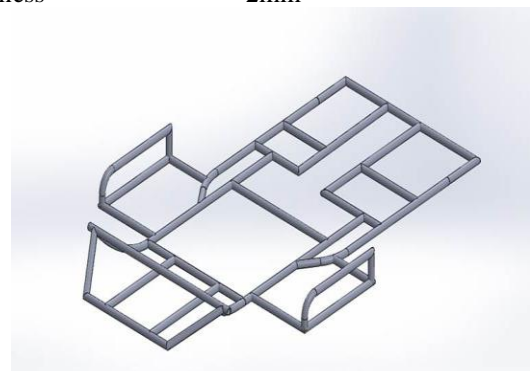



**VI. JUSTIFICATION**


Round hollow tubes are light in weight

**VII. FABRICATION PROCESSES**

Lathe Work, Cutting, Drilling, Milling, Shaping , Grinding, Polishing, Finishing, Welding


**Front Impact Analysis**

Using the gross weight of the vehicle is 160kg  
 The impact Force was calculated based on G-load of 5

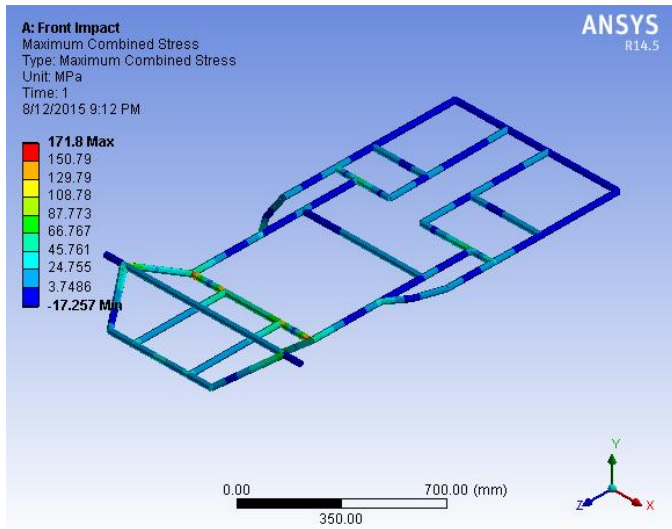


Load applied: 5000 N  
 Maximum stress induced: 171.8 Mpa  
 Displacement: 1.9mm  
 Factor of safety: 2.2

**Side Impact Analysis**

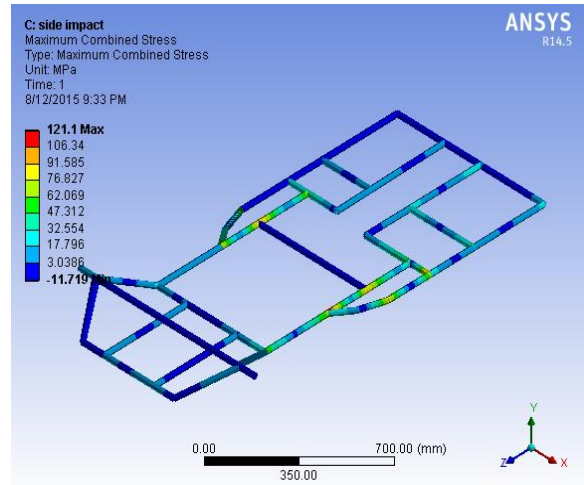

Load applied: 3500N  
 Maximum stress induced: 121.1Mpa  
 Displacement: 1.14mm  
 Factor of safety: 2.5

**Rear Impact Analysis**

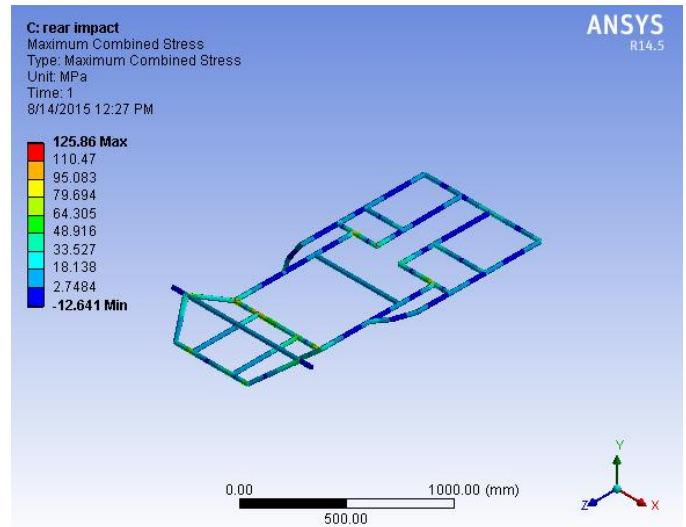


Load applied: 2500N  
 Maximum stress: 125.86Mpa  
 Displacement: 6mm  
 Factor of safety: 2.4

**Wheel Hub Analysis**

The following are the considerations took for the design of wheel hub for 25.4 mm shaft:  
 Material: Mild Steel  
 Braking torque: 975N-m




Load: 1500N

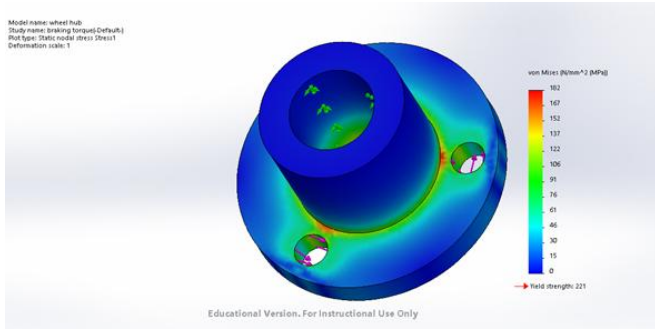

Maximum stress : 182Mpa

Yield strength: 221Mpa

Factor of safety: 1.21

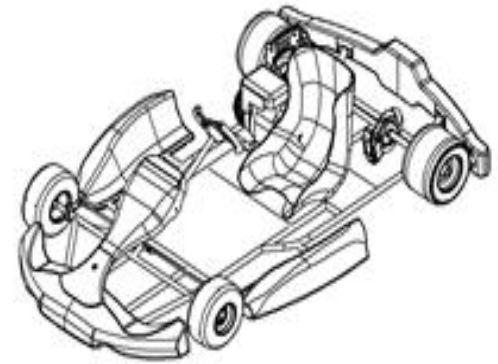

Isometric view of the vehicle


### Disc Hub Analysis

The following are the considerations took for the design of wheel hub for 25.4 mm shaft:

Material: Mild Steel

Braking torque: 975N-m


Load: 1500N

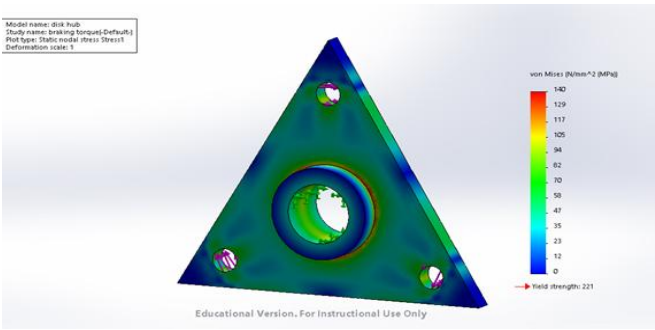

Maximum stress: 140Mpa


Yield strength: 221Mpa

Factor of safety: 1.57

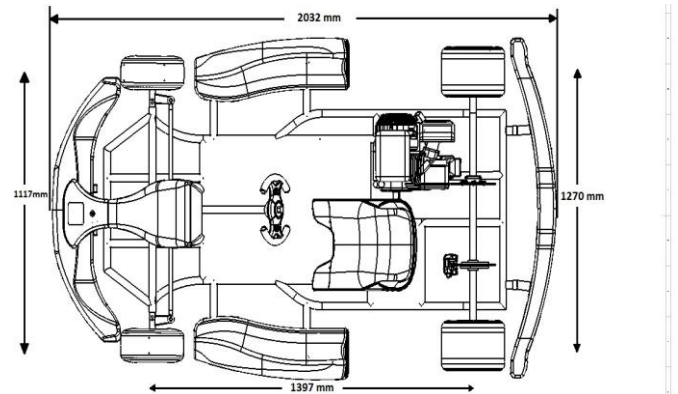


Top view of vehicle

### IX. DIFFERENT VIEWS OF THE VEHICLE

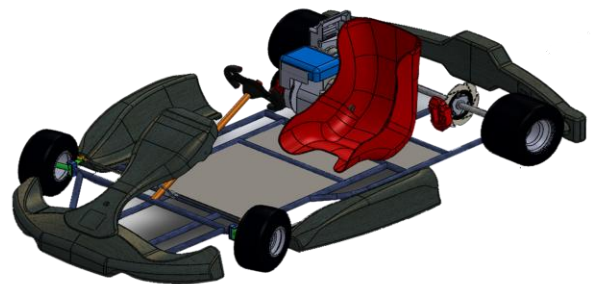


Isometric View of the vehicle


### VIII. VEHICLE DRAWING AND DIMENSIONING

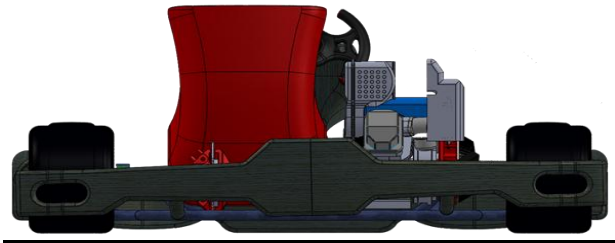


Rear View of the vehicle

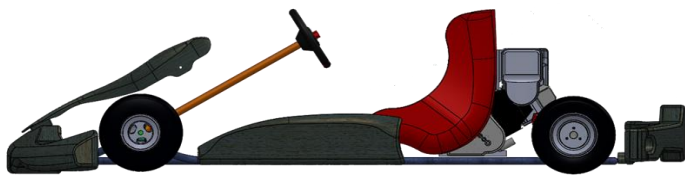

Side View of the vehicle

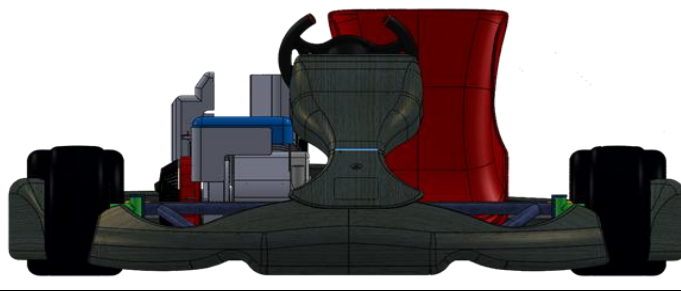

Front View of the vehicle

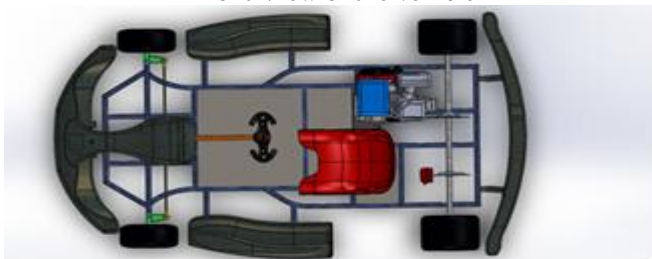

Top View of the vehicle

X. DESIGN PARAMETERS

CHASSIS	Seamless tube	IS 1161
WHEELBASE	1066.8 mm	

OVERALL LENGTH OF VEHICLE	1778 mm	
TRACK WIDTH	914.4 mm	Front
	1066.8 mm	Rear
TYPE OF ENGINE	3.5HP 127cc engine	
STEERING	Mechanical linkage	
WHEELS AND TYRES	10*4.5*5	front
	11*7.1*5	rear
BRAKES	Hydraulic disc brake	Rear
TRANSMISSION	Centrifugal clutch	
MASS OF THE VEHICLE	87.8kg	approx.
GROUND CLEARANCE	2 Inch	from bottom most part

XI. STEERING SYSTEM

Mechanical arrangement is planned to be used this type of steering system was selected because of its simple working mechanism and a steering ratio of 1:1 so to simple we have used mechanical type linkage.



Our steering geometry is having 99% Ackerman and also gives 60degree lock to lock turn of steering wheel which is



very suitable for the race track as it allows quick turns with a small input and being more precise at the same time. We also attain a perspective turning radius of 2.37meter.

COMPONENTS	DIMENSIONS
Tie Rod	14 inch x 0.5 inch $\phi$
King-Pin	3 inch x 1.5 inch x 11mm $\phi$
Bracket	3.5 inch x 2.5 inch x 0.5 inch
Pit-man arm	1 inch x 2 inch x 10 mm $\phi$
Bolt	10 mm $\phi$
Steering shaft	20 inch x 1 inch $\phi$
Steering wheel	10 inch $\phi$

According to the Ackermann geometry the front tyres will rotate about the mean point as a result the entire force will act on the outer front tyre on a corner. Thus the cornering traction will be primarily governed by the outer tyre.

We have chosen the mechanical linkage because it is cheap, light in weight and easy to manufacture.

## XII. CONSIDERATIONS FOR STEERING SELECTION

- Amount of steering wheel travelling is decreased
- It is simple and cheap

GEOMETRY	VALUES
----------	--------

Caster Angle	12 degrees
Camber Angle	0 degrees
King pin Inclination	10 degrees
Combined Angle	10 degrees
Toe-in	5 mm
Scrub Radius	9 mm
Minimum Turning Radius	1.12 m
Maximum Turning Radius	2.59m

## XIII. CALCULATIONS

Inner lock angle ( $\theta$ ) = (total steering wheel rotation \* 360) / steering ratio = 40 degrees

Outer lock angle( $\phi$ )=  $\cot \phi - \cot \theta = w / l = 25.57$ degrees

Ackerman angle calculation:  $\tan \alpha = (\sin \phi - \sin \theta) / (\cos \phi + \cos \theta - 2) = 32.46$  degrees

Ackerman inside angle:  $\Psi = \tan^{-1} (WB / (WB / \tan \phi - TW)) - \phi = 13.36$  degrees

Ackerman percentage: %Ackerman = ((inside angle - outside angle) / (Inside 100% Ackerman)) \* 100% = 99.97%

Turning Radius( $R_{max}$ ) Calculation

$R_{min} = \text{length of wheel base} / \tan \theta = 1.12$  m

$R_{max}^2 = [R_{min} + \text{Wheel track width}]^2 + \text{Length of wheel base}^2 = 2.59$  m

## XIV. BRAKING SYSTEM

The **braking system** has to provide enough braking force to completely **lock the wheels** at the end of a specified acceleration run, it also proved to be cost effective. The braking system was designed by determining parameters necessary to produce a given deceleration, and comparing to the deceleration that a known braking system would produce.



**Considerations for braking system selection:**

Discs, calipers and master cylinders which were used for considering suitable vehicle after market survey

Sr. No.	Disc	Outer diameter in mm	Thickness in mm
1	Pulsar 150	240	6
2	Pulsar 220	230	8
3	Apache RTR 180	200	6

**Reasons for selection for apache RTR 180 disc**

- Thickness (6mm) is not too high
- Outer diameter is 200mm which is in accordance with our required design

We have used floating type calliper in our design and finalised Apache RTR 180 calliper

**XV. BRAKE FLUIDS**

We have decided to use DOT 3 Brake fluid

- Economical
- Easily available
- Compatible

**XVI. WEIGHT DISTRIBUTION**

Gross weight of the kart = 160kgs

Front: Rear = 2:3

Type	Specification
Rear disc	OD – 200 mm
Master cylinder Dia.	10 mm
Caliper piston diameter	25.4 mm

Brake Pedal Lever ratio	4:1
Stopping distance	2.237 m

**XVII. CALCULATIONS**

1. Gross weight of the vehicle

$$W = \text{weight of the vehicle (with load conditions) in kgs} * 9.81 = 160 * 9.81 = 1569.6N$$

2. Brake line pressure:

$$p = \text{force on the brakes / area of master cylinders (as pedal ratio is 4:1)}$$

$$\text{(Assume the normal force applied on the pedal: 350n)}$$

$$= \text{pedal ratio} * \text{force on the pedal} / \text{area of master cylinder}$$

$$= 4 * 350 / (\pi/4) * (0.01)^2$$

$$= 17.8343Mpa$$

3. Clamping force (CF):

$$Cf = \text{brake line pressure} * (\text{area of caliper piston} * 2)$$

$$= 17.8343 * (\pi/4) * (25.4 * 10^{-3})^2 * 2$$

$$= 18064.6825N$$

4. Rotating force:

$$RF = CF * \text{number of caliper pistons} * \text{coefficient friction of brake pads}$$

$$= 18064.4334 * 0.3 * 2$$

$$= 10838.6825N$$

5. Braking torque (tn) = rotating force\* effective disc radius

$$08 = 138.6825 * 0.09$$

$$= 975.48 N\cdot m$$

(torque available at the two tires of the rear shaft)

6. Braking force=(braking torque /tire radius)\*0.8

$$= 6982.6677 * 0.8$$

$$= 5586.0820N$$

7. Deceralation:

$$f = -ma \text{ (-ve sign indicates force in opposite direction)}$$

$$a = -B.f/m = 5586.0820/160$$



=-34.913m/s

8. Stopping distance:

$v^2 - u^2 = 2*a*d_s$  (v=0,u=12.5m/s)  
 Stopping Distance =2.2370meters

XVIII. ENGINE AND TRANSMISSION

The engine in deployed in our Kart is BRIGGS and STRATTON 3.5HP 127 CC it has 14kg weight with single cylinder.

XIX. ENGINE SPECIFICATIONS

Configuration	Value
Engine Technology	single cylinder , 4-stroke,air cooled , OHV(Over Head Valve)
Maximum Power	3.5 HP@3600 R.P.M
Gross Torque	7.5 N-M@2600 R.P.M
Bore*Stroke	62mm*42mm
Displacement	127cc
Dry Weight	14 Kg
Fuel Capacity	1.8L
Length	261mm
Width	347mm
Height	326mm

Assuming transmission efficiency = 80%  
 Gross weight of the Kart = 160kgs  
 Number of teeth on CVT output = 54  
 Number of teeth on rear shaft sprocket = 36  
 Ratio = 0.66:1

SPEED (RPM)	CVT RATIO	SPROCKET RATIO	FINAL RATIO
1850	16	0.66	10.56

2750	10	0.66	6.6
3600	6.4	0.66	4.224

XX. CALCULATIONS

Speed = (circumference of the wheel \* rear shaft rpm) / (60\*1000) m/s

$$= (\pi * 11 * 25.4 * 852.27) / (60 * 1000)$$

$$= 12.468 \text{ m/s}$$

$$= 44.86 \text{ km/hr.}$$

Drive torque = engine torque \* reduction \* efficiency

$$= 7.5 * 16 * 0.66 * 0.8 = 63.36 \text{ Nm}$$

Drive force = drive torque/radius of wheel

$$= 63.36 * 1000 / 5.5 * 25.4 = 453.54 \text{ N}$$

N

Acceleration = Drive Force/mass

$$= 453.54 / 160 = 2.83 \text{ m/s}^2$$

XXI. BODY WORKS


External appearance of the vehicle depends upon bodyworks. It is an important part of the vehicle design. It also dominates sale and marketing of the vehicle.

We have selected fiber on the basis of market survey because of its

- light weight
- good electrical insulator

XXII. SAFETY AND ERGONOMICS

Safety is the most important concern for our Go-kart. Bumper is provided for safety. In addition fire extinguishers and kill switches will also be used in case of emergency. Ergonomics are designed perfectly for the comfort of the driver.

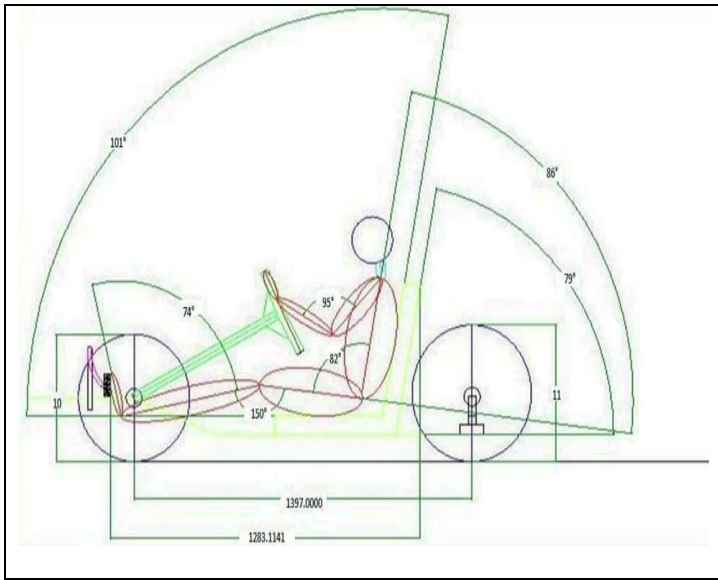

SPECIFICATIONS

VALUES

KNEE ANGLE	<b>150 DEGREES</b>
ELBOW ANGLE	<b>95 DEGREES</b>

**XXIII. ELECTRICALS**

12V DC Battery will be used to power all the electrical components.

**XXIV. CONCLUSION:**

The design and construction for GO-KART DESIGN CHALLENGE 2015 has become more challenging due to the increased participation. Our team is participating for the first time in this event so a detailed study of various automotive systems is taken as our approach. Thus this report provides a clear insight in design and analysis of our vehicle

The making of this report has helped us in learning of various software. We want to give a vote of Thank you in this regard as GKDC competition has given as this opportunity to learn many things which will also help us in leading a bright future.

**XXV. REFERENCES**

1. TUNE TO WIN -Carroll Smith
2. Fundamentals of Vehicle Dynamics - Thomas a Gillespie
3. Automobile Engineering – Kirpal Singh

4. Wikipedia
5. Google Search engine
6. Jeyanthi Rebecca, L., Dhanalakshmi, V., Sharmila, S., Effect of the extract of *Ulva* sp on pathogenic microorganisms, *Journal of Chemical and Pharmaceutical Research*, v-4, i-11, pp-4875-4878, 2012.
7. Sharmila, S., Jeyanthi Rebecca, L., GC-MS Analysis of esters of fatty acid present in biodiesel produced from *Cladophora vagabunda*, *Journal of Chemical and Pharmaceutical Research*, v-4, i-11, pp-4883-4887, 2012.
8. Anbuselvi, S., Rebecca, J., A comparative study on the biodegradation of coir waste by three different species of Marine cyanobacteria, *Journal of Applied Sciences Research*, v-5, i-12, pp-2369-2374, 2009.
9. Arunachalam, A.R., Bringing out the effective learning process by analyzing of E-learning methodologies, *Indian Journal of Science and Technology*, v-7, i-, pp-41-43, 2014.
10. Sharmila, S., Jeyanthi Rebecca, J., A comparative study on the degradation of leather industry effluent by Marine algae, *International Journal of Pharmaceutical Sciences Review and Research*, v-25, i-2, pp-46-50, 2014.
11. Anbuselvi, V.S., Isolation and characterization of polythene degrading bacteria from polythene dumped garbage, *International Journal of Pharmaceutical Sciences Review and Research*, v-25, i-2, pp-205-206, 2014.
12. Sharmila, S., Rebecca Jeyanthi, L., Saduzzaman, M., Biodegradation of tannery effluent using *Prosopis juliflora*, *International Journal of ChemTech Research*, v-5, i-5, pp-2186-2192, 2013.
13. Jaleel, I., Saikumar, P., Devak, P.R., Effect of Hb% on cognitive skills in UG medical students, *Journal of Clinical and Diagnostic Research*, v-7, i-7, pp-1325-1327, 2013.
14. Hanirex, D.K., Kaliyamurthie, K.P., Mining frequent itemsets using genetic algorithm, *Middle - East Journal of Scientific Research*, v-19, i-6, pp-807-810, 2014.
15. Jeyanthi Rebecca, L., Sharmila, S., Das, M.P., Seshiah, C., Extraction and purification of carotenoids from vegetables, *Journal of Chemical and Pharmaceutical Research*, v-6, i-4, pp-594-598, 2014.
16. Prem Jeya Kumar, M., Gopalakrishnan, K., Srinivasan, V., Anbazhagan, R., Sundeep Anan, J., PC modeling and simulation of car suspension system, *Indian Journal of Science and Technology*, v-6, i-SUPPL5, pp-4629-4632, 2013.
17. Meenakshi, C.M., Kumar, A., Priyadarshi, A., Dash, D.K., Krishna, H., Analysis of spur gear using finite element analysis, *Middle - East Journal of Scientific Research*, v-12, i-12, pp-1672-1674, 2012.
18. Sachithanandam, P., Meikandaan, T.P., Srividya, T., Steel framed multi storey residential building analysis



and design, International Journal of Applied Engineering  
Research, v-9, i-22, pp-5527-5529, 2014.

19. Automotive Mechanics-William H Crouse

# IJEAST

INTERNATIONAL JOURNAL  
OF ENGINEERING APPLIED SCIENCE  
AND TECHNOLOGY

## ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

## FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



### PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



### OPEN ACCESS

Free and unrestricted access to research for all.



### GLOBAL REACH

Connecting researchers and professionals worldwide.



### TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website  
[www.ijeast.com](http://www.ijeast.com)



INTERNATIONAL JOURNAL  
OF ENGINEERING APPLIED SCIENCE  
AND TECHNOLOGY

✉ [editor@ijeast.com](mailto:editor@ijeast.com)

🌐 [www.ijeast.com](http://www.ijeast.com)

📍 India



2455-2143