

# A SUSTAINABLE MULTI-ENERGY VEHICLE ARCHITECTURE BASED ON ELECTRIC, HYDROGEN, AND SOLAR TECHNOLOGIES

Manendra Kumar Lal  
Department of Mechanical Engineering  
TPEM, Ahmedabad, Gujrat, India

**Abstract—** The transportation sector is a major contributor to greenhouse gas emissions. While battery electric vehicles (BEVs), hydrogen fuel cell vehicles (FCEVs), and solar-assisted vehicles reduce emissions individually, they face limitations in driving range, energy availability, and infrastructure. This research proposes a multi-energy vehicle architecture integrating battery, hydrogen, and solar technologies into a unified electric propulsion system. Detailed vehicle architecture, component sizes, energy management, performance analysis, and comparisons with existing vehicles are presented. The proposed system demonstrates enhanced range, efficiency, and sustainability, providing a feasible solution for next-generation sustainable mobility.

**Keywords—** Multi-energy vehicle, hybrid electric vehicle, hydrogen fuel cell, solar energy, sustainable transportation, energy management system.

## I. INTRODUCTION

### A. Background

1. Transportation contributes approximately 24% of global CO<sub>2</sub> emissions. Internal combustion engine (ICE) vehicles rely on fossil fuels, causing pollution and climate change. Renewable-powered vehicles provide an alternative.

2. Battery Electric Vehicles (BEVs): Zero tailpipe emissions; limited range and dependency on charging infrastructure.

3. Hydrogen Fuel Cell Vehicles (FCEVs): Long driving range; fast refueling; hydrogen storage and infrastructure challenges.

4. Solar-Assisted Vehicles: Renewable energy harvesting; limited energy due to panel area and efficiency.

Integrating these technologies into a single multi-energy vehicle overcomes individual limitations, enhances reliability, and improves sustainability.

### B. Motivation

- Reduce dependency on a single energy source
- Extend driving range beyond conventional EV's
- Improve energy efficiency through intelligent energy management
- Provide a sustainable model for future mobility

## II. OBJECTIVES

The main objective of this study is to conceptualize and design a vehicle architecture that effectively integrates battery storage, hydrogen fuel cell technology, and solar energy as complementary power sources. The work further focuses on developing a multi-source energy management system that can intelligently control and balance power flow among these sources to enhance energy efficiency, reliability, and overall vehicle performance under varying operating conditions. In order to assess the practicality of the proposed approach, a detailed comparison will be carried out with existing Battery Electric Vehicles (BEVs), Fuel Cell Electric Vehicles (FCEVs), Solar Electric Vehicles, and conventional Internal Combustion Engine (ICE) vehicles. Additionally, the study aims to analyze the environmental impact, economic feasibility, and operational advantages of the proposed system, highlighting its potential to reduce emissions, lower operating costs, and support long-term sustainable transportation.

## III. LITERATURE REVIEW

The transition toward cleaner transportation systems has encouraged extensive research into alternative vehicle technologies that reduce reliance on fossil fuels. Among these, Battery Electric Vehicles (BEVs) have emerged as the most commercially established solution. Well-known models from manufacturers such as Tesla, Nissan, and Hyundai demonstrate the benefits of electric propulsion, including high energy efficiency, smooth operation, and the elimination of tailpipe emissions. Nevertheless, BEVs continue to face practical challenges related to limited driving range, extended charging durations, battery lifespan, and dependence on electrical grids that may still rely on non-renewable energy sources.

Fuel Cell Electric Vehicles (FCEVs) offer a different approach by converting hydrogen into electricity through electrochemical processes. Vehicles like the Toyota Mirai and Hyundai NEXO illustrate the potential of this technology to deliver longer ranges and faster refueling compared to battery-only vehicles, with relatively high energy conversion efficiency. Despite these advantages, widespread adoption of FCEVs remains constrained by high system costs, difficulties associated with hydrogen storage and transportation, and the lack of a well-developed hydrogen refueling infrastructure.



Solar-powered vehicles have also gained attention as a means of incorporating renewable energy directly into vehicle operation. By integrating photovoltaic panels on vehicle surfaces, designs such as Lightyear 0, Aptera, and various solar vehicle prototypes can generate small but meaningful amounts of energy during daily use. Although the power produced is insufficient to serve as a standalone energy source, it can typically support a limited daily driving range and reduce dependence on external charging, particularly in regions with strong sunlight availability.

Recent studies emphasize the potential of multi-energy vehicle systems that combine battery storage, hydrogen fuel cells, and solar energy generation. This integrated strategy aims to exploit the advantages of each energy source while minimizing their individual limitations. Batteries ensure high efficiency and effective energy recovery, fuel cells enable extended driving range and rapid energy replenishment, and solar panels provide continuous renewable energy input. Literature suggests that

such hybrid architecture can enhance vehicle reliability, improve energy utilization, and significantly lower environmental impact, positioning multi-energy vehicles as a promising pathway toward sustainable and resilient transportation solutions.

#### IV. PROPOSED SYSTEM ARCHITECTURE

The proposed vehicle is fully electric, with energy supplied by battery, hydrogen fuel cell, and solar panels.

##### A. Components

- Battery Pack (primary energy storage)
- Electric Motor (propulsion)
- Solar Photovoltaic Panels (supplemental energy)
- Hydrogen Fuel Cell System (backup power)
- Energy Management System (EMS)

##### B. Multi-Energy Vehicle Block Diagram

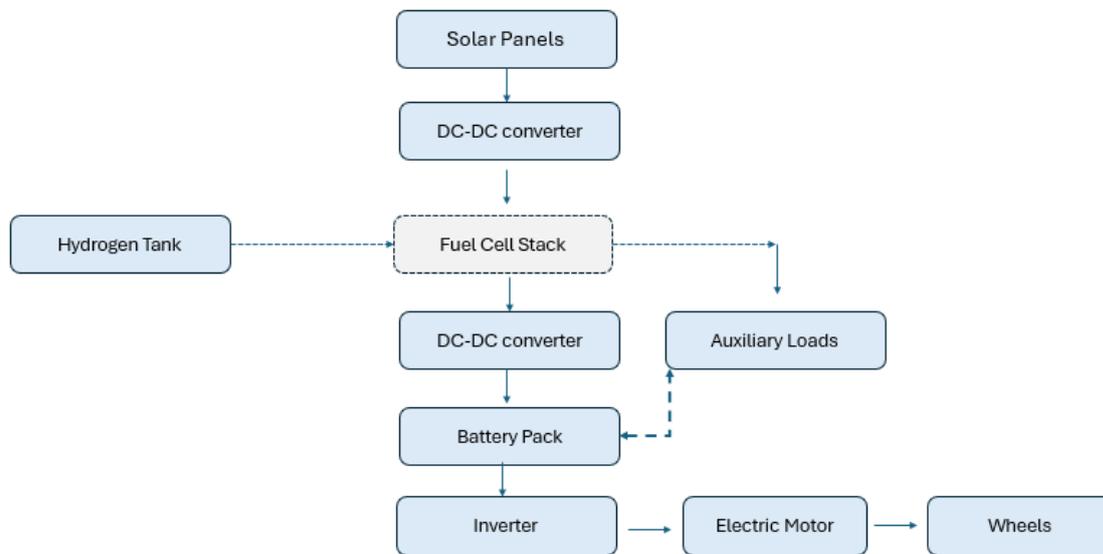


Fig 1:- Multi energy vehicle block diagram

#### V. WORKING PRINCIPLE

- Battery Mode: Normal driving powered by battery via inverter
- Solar Mode: Solar panels charge battery through MPPT DC-DC converter
- Hydrogen Mode: Fuel cell supplies electricity when battery SOC is low or additional power is needed

- Regenerative Braking: Converts kinetic energy into stored battery power

#### VI. ENERGY MANAGEMENT SYSTEM (EMS)

Priority Strategy: Solar → Battery → Hydrogen Fuel Cell

Functions: Monitors battery SOC, solar output, vehicle power.

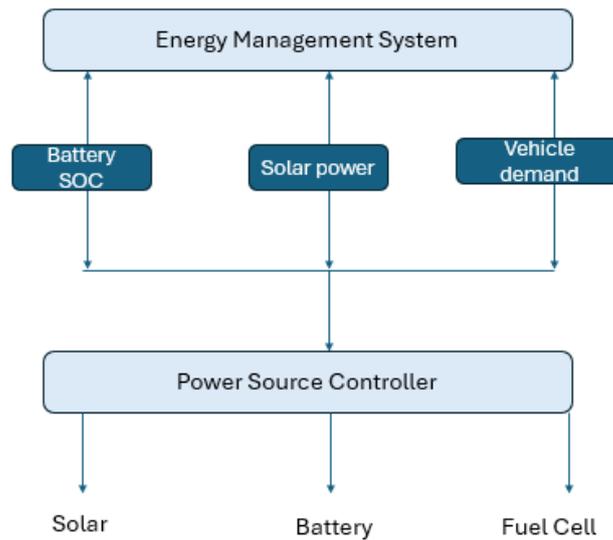


Fig2:-Vehicle Energy Management System

**VII. SUBSYSTEM DESIGN**

**A. Hydrogen Fuel Cell Subsystem**

- Fuel cell stack converts hydrogen to electricity (~60% efficiency)
- DC-DC converter adjusts voltage for battery/motor
- Only byproduct is water vapor

**B. Solar Energy Subsystem**

- Roof, hood, trunk panels (3–5 m<sup>2</sup>, 20–25% efficiency)
- MPPT controller maximizes energy harvesting
- Supplements battery to reduce grid dependence

- Hydrogen-assisted range: 400–500 km
- Solar contribution: 5–15 km/day
- Combined total range: 700+ km
- Motor efficiency: ~90%; regenerative braking adds ~10% recovery

**IX. EXISTING VEHICLES**

Battery EVs: Tesla Model 3, Nissan Leaf, Hyundai Ioniq  
 FCEVs: Toyota Mirai, Hyundai NEXO, Honda Clarity  
 Solar EVs: Lightyear 0, Aptera Solar EV, Sono Motors Sion

**VIII. PERFORMANCE ANALYSIS**

- Battery-only range: 250–300 km

**X. COMPARATIVE ANALYSIS**

Parameter	ICE	Battery EV	Hydrogen FCEV	Solar EV	Proposed Multi-Energy Vehicle
Energy Sources	Gasoline	Electricity	Hydrogen	Electricity + Solar	Electricity + Hydrogen + Solar
Tailpipe Emissions	High	Zero	Zero	Zero	Zero
Driving Range	400–800 km	350–500+ km	500–700 km	100–300+ km	700+ km estimated
Refueling / Charging	Minutes	Hours	Minutes	Hours	Flexible (grid + hydrogen + solar)
Infrastructure	Widespread	EV Charging	Hydrogen Stations	EV + Solar	Hybrid Infrastructure
Environmental Impact	High	Low	Low	Low	Very Low

**XI. VEHICLE ARCHITECTURE, SIZES, AND LAYOUT**

A. Vehicle Dimensions

Parameter	Approx. Size	Notes
Length	4.6 m	Mid-size sedan / crossover
Width	1.85 m	Interior & battery layout
Height	1.6 m	Aerodynamics + solar panel placement
Wheelbase	2.8 m	Stability with battery weight
Ground Clearance	160 mm	Urban + light off-road

Table 1:- Vehicle dimensions (Approx.)

B. Component Approximate Sizes

Component	Size / Volume	Remark
Battery Pack	1.8 × 1.5 × 0.25 m → ~0.675 m <sup>3</sup>	Underfloor layout
Hydrogen Tank	2 × 1.2 × 0.3 m cylinders → ~0.216 m <sup>3</sup>	Rear / under seats
Fuel Cell Stack	1.2 × 0.6 × 0.4 m → ~0.288 m <sup>3</sup>	Front engine bay
Electric Motor	0.5 × 0.4 × 0.4 m → ~0.08 m <sup>3</sup>	Single or dual motor
Inverter	0.6 × 0.4 × 0.2 m → ~0.048 m <sup>3</sup>	Integrated with motor/battery
Solar Panels	3-5 m <sup>2</sup>	Roof, hood, trunk
Vehicle Cabin	2.5 × 1.6 × 1.2 m → ~4.8 m <sup>3</sup>	4-5 passengers
Chassis & Body	4.6 × 1.85 × 1.6 m	Mid-size vehicle footprint

Table 2 :- Component size approx.

C. Weight Distribution (Approx.)

Component	Weight (kg)
Battery Pack	500-600
Hydrogen Tank + Fuel	120-150
Fuel Cell Stack	100-150
Electric Motor	100-150
Chassis & Body	900-1000
Solar Panels + Electronics	50-80
Passengers + Cargo	300-400
<b>Total</b>	<b>2,170-2,530</b>

Table 3 :- Component weight size approx.

XII. ADVANTAGES

- Extended driving range
- Reduced dependency on a single energy source



- Zero tailpipe emissions
- Flexible, resilient energy system
- Suitable for sustainable future mobility

### XIII. CHALLENGES

- High initial cost
- Limited hydrogen infrastructure
- System complexity
- Limited solar panel output

### XIV. FUTURE SCOPE

- Advanced solid-state batteries
- High-efficiency lightweight solar panels
- Cost-effective fuel cell materials
- AI-driven EMS for optimized energy management
- Hydrogen refueling network expansion

### XV. CONCLUSION

The multi-energy vehicle architecture integrating battery, hydrogen, and solar technologies demonstrates enhanced range, energy efficiency, and sustainability. Proper vehicle sizing, weight distribution, and subsystem placement ensure practicality and safety. This design provides a feasible blueprint for next-generation sustainable transportation.

### XVI REFERENCES

- [1]. Oluwalana, Oluwapelumi John & Grzesik, Katarzyna, 2025, Solar Powered Electric Vehicles: Comprehensive Review of Technology Advancements, Challenges, and Future Prospects, *Energies* 18(14):3650, DOI:10.3390/en18143650.
- [2]. Narasimhulu, Namala & Naidu, R. S. R. Krishnam & Falkowski Gilski, Przemysław & Divakarachari, Parameshachari Bidare & Roy, Upendra, 2022, Energy Management for PV Powered Hybrid Storage System in Electric Vehicles Using ANN & Aquila Optimizer, *Energies* 15(22):8540, DOI:10.3390/en15228540.
- [3]. Padmagirisan, P. & Sankaranarayanan, V., 2019, Powertrain Control of a Solar Photovoltaic Battery Powered Hybrid Electric Vehicle, *Frontiers in Energy* 13(2):296–306, DOI:10.1007/s11708 018 0605 8.
- [4]. Khadhraoui, A. & Selmi, T. & Cherif, A., 2022, Energy Management of a Hybrid Electric Vehicle, *Engineering, Technology & Applied Science Research* 12(4):8916–8921, Page No.:8916–8921.
- [5]. Mounica, V. & Obulesu, Y. P., 2022, Hybrid Power Management Strategy with Fuel Cell, Battery, and Supercapacitor for HEV, *Energies* 15(12):4185, DOI:10.3390/en15124185.
- [6]. Zhang, Xiaodong & Chau, K. T. & Chan, C. C., 2010, A Multi Hybrid Energy System for Hybrid Electric Vehicles, *World Electric Vehicle Journal* 4(3):505–510, Page No.:505–510.
- [7]. Xu, Wenxiang & Liu, Mengnan & Xu, Liyou & Zhang, Shuai, 2022, Energy Management Strategy of Hydrogen Fuel Cell/Battery/Ultracapacitor Hybrid Tractor Based on Efficiency Optimization, *Electronics* 11(21):4221, DOI:10.3390/electronics13214221. OUCI
- [8]. Oluwalana, Oluwapelumi John & Grzesik, Katarzyna, 2025, Solar Powered Electric Vehicles and VIPV Systems: Challenges for Sustainable Mobility, *Energies* 18(14):3650, DOI:10.3390/en18143650.
- [9]. Renewable Energy Journal, 2022, Hybrid Energy System Integration & Management for Solar Energy: A Review, *Energy Conversion and Management: X* 21:100527, DOI:10.1016/j.ecmx.2024.100527
- [10]. Aghanouri, Amirhesam & Sabry, Mohamed & Varughese, Joshua Cherian & Olaverri Monreal, Cristina, 2025, Machine Learning Based Performance Study of Solar Powered Hydrogen Fuel Cell Hybrid Vehicles, arXiv:2510.17808,
- [11]. Larminie, John, 2012, *Electric Vehicle Fundamentals and Integrated Renewable Concepts*, (book reference)
- [12]. Veziroğlu, T. Nejat, 2020, *Hydrogen Fuel Cell Technologies for Transportation Applications*, (book reference)
- [13]. Solar Powered EV Review Authors, 2025, *Solar Powered Electric Vehicles – Battery & Fuel Cell Hybrids: A Review*, *Energy* 4:100039, DOI:10.1016/j.energ.2025.100039.
- [14]. Bohre, Aashish Kumar & Chaturvedi, Pradyumn & Kolhe, Mohan Lal & Singh, Sri Niwas (eds.), 2022, *Planning of Hybrid Renewable Energy Systems, Electric Vehicles and Microgrid: Modeling, Control and Optimization*, Springer, Page No.:XXIV+1009, DOI:10.1007/978 981 19 0979 5.
- [15]. Hybrid Electric Infrastructure Book Authors, 2025, *Hybrid Renewable Power Infrastructure for Sustainable Electric Vehicle Development*, Springer Nature,