



IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY



VOLUME : 7 ISSUE : 12 Print / Issue Publication Date: 06-Jun-2023



ISSN : 2455-2143



DOI : 10.33564/IJEAST.2023.v07i12.006

Indexed In



WWW.IJEAST.COM

editor@ijeast.com



A SURVEY ON AIR WRITING CHARACTER RECOGNITION AND TRANSLATION

Ekta R S, Kajal C K, Manali V P, Vaishnavi M K, Shraddha S K, Pranali M S
Department of CSE
AGTI'S DACOE, Karad, Maharashtra, India

Abstract— Computer systems are increasingly using air-writing recognition since it can be done quickly and intelligently. The term "air-writing acknowledgment apparatus" refers to the use of a stylus to draw an articulated character or expression in free space. This study presents a simple yet effective convolutional neural network-based air-writing recognition method (CNN). It is suggested to use a plausible algorithm tracking hands to reward air-writing circles captured through a web camera. This study provides a straightforward but efficient method for recognizing air-writing that uses deep convolutional neural networks (CNNs). With the aid of hand motions, users can write characters in the air that are subsequently translated into written text using an air writing character recognition and translation technology. Convolutional neural networks (CNN), which are trained to recognise and decipher human hand gestures, power this technology. The device uses a camera to record the hand movements and then runs the data through CNN to identify the characters being typed. The identified characters are then converted into text that may be presented on a screen using text-to-speech technology.

Keywords— Convolutional Neural Network (CNN), Air-Writing, Translator, Deep Learning

I. INTRODUCTION

The capacity of robots to replicate or enhance human intelligence, including logic learning from background, has

increased dramatically with the development of synthetic intelligence technologies. Artificial intelligence has long been utilised in computer programmes, but it is now present in a wide variety of products and services. The next iteration of such technology appears to be virtual augmented reality, which uses specialised glasses to project output directly into the users' eyes. It is often believed that using speech recognition is a natural and intuitive method to communicate with technology. Speech recognition does not, however, meet all the requirements for technological communication. To recognise the objects in an image, some digital cameras, for instance, employ artificial-intelligence. The advancement of artificial intelligence technology has led to the creation of several intelligent applications, such as smart TVs and intelligent robots. Dynamic gesture is the most instinctive approach for people to interact with these intelligent systems. There has been a lot of attention in recent years in a technique called gesture recognition that can be used as a communication tool by next-generation technologies. Air writing has recently grown in popularity as one of the most dynamic gestures. The practise of writing letters or words in empty space with hand or finger motions is referred to as "air writing." If the gesture makes any kind of predetermined movement it could be viewed as a particular instance of gesture when done in the air. In user interfaces when the person cannot group on a console, correspond on a touchpad or a touchscreen, or enter language for controlling an intelligent system, air writing is especially helpful [3].

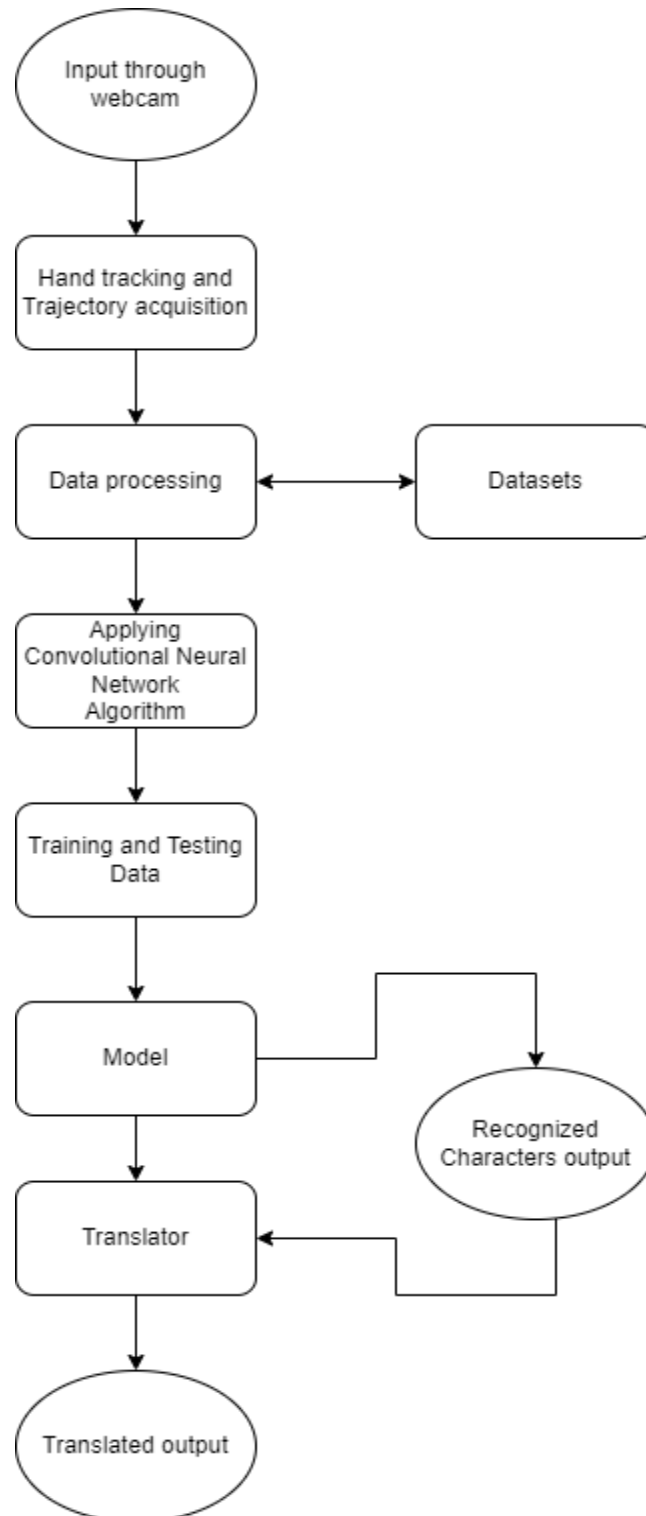


Fig. 1. Flow chart of proposed air – writing system

But identifying characters created by air-writing is not an easy feat. Most commonly, air-writing is connected to the understanding of sign language or motion gestures. However, there are two types of motion gestures: device-based and

device-free. A human can engage with a device without using touch or sound thanks to device-based gesture devices. The technology is able to recognise and interpret movements or actions to determine how to operate. To detect movement,



each gesture control device has a separate motion sensor. For instance, portable pointing devices like motion sensors on watches [72] or inertial sensors fastened to gloves [69]. The device-free method is further suited than the device-based method since consumers do not need to handle any equipment. Once more, the device-free techniques are split into vision-based and radio-based techniques. These many types of 2D or 3D cameras have been used to detect the input images for the vision-based method, which has been developed based on computer vision techniques to recognise hands. The design makes an effort to identify and categorise hand attributes, including skin tone, look of colour, deep learning identification, and more. The latter collects gesture signals using radio sensors like Wifi [67]-[69] or radar. Fine-grained movement distinguishes characters from generic gestures, and different writers can write characters in different ways [60]-[62]. The alphabet and digits are typically written with multiple strokes in pen-and-paper-like systems. In contrast to the traditional writing system, air-writing is unique. Lifting a pen results in much less obvious movements than writing in the air. People are unable to see what they are writing as they could while using paper since they lack about sense of touch. This is because they cannot touch anything, such a pen or a piece of paper touch. This is because they cannot touch anything, such a pen or a piece of paper.

Three types of air-writing can be identified: solitary, connected, air writing. In isolated writing, each letter is sequentially placed in a fictitious field with a predetermined elevation and breadth in an image's field of vision. Similar to writing on paper, connected writing involves writing multiple alphabets from left to right. The final method allows you to write numerous letters consecutively one on top of the other inside the same hypothetical box. We look at this paper's singular writing style [71].

To suggest a some new technique for air-writing recognition that solves these problems and uses a webcam or a normal laptop camera as the VHS input.

Finding the writing hand disguise for the air writing initiation. Accurate fingertip discovery and shadowing in real-time; and recognising a character line written in the air. Due to a number of comparable elements, like blurred fingertip movements, a cluttered background, and variations in lighting, the work is fairly sensitive.

The main issue has been solved for vision-based methods, but special solutions are required for 2nd and 3D photo sensors. Because it is difficult to watch fingers without markers, 2D camera-based structures commonly incorporate colour markers on the palms to improve growth tracking performance. The hand/finger tracking issue is well handled by 3D camera-based systems employing the intensity data provided by 3D image sensors like Kinect, jump movement Controller (LMC), or Intel RealSense camera.

Using the rapid R-CNN framework for precise hand detection, hand segmentation, and eventually computing the number of

lifted fingers based on dimensional characteristics of the hand, we suggest a very new writing hand track detection approach for the beginning of air-writing. This work addresses the aforementioned challenges.[6]

Making use of a brand-new trademark function known as distance-weighted curvature entropy, we suggest a reliable fingertip detection strategy.

As a delineator and to indicate the end of the air-writing gesture, we suggest a fingertip velocity-based termination criterion. In summary, 3D camera-based systems are better able to address the initial issues than systems using 2D cameras. Yet, 3D systems are more expensive and complex.

To keep track of an object using a laptop's webcam and to save the data associated with it. The object can be a fingertip or any particular color, but we chose to track things that were that color. Once we have the information from tracking the item, we use trained CNN to anticipate the information that was previously stored in the void. Convolutional neural networks (CNN) are being used to find the letters or sentences that are being written in the air. As a result, we developed effective deep learning-based algorithms called the convolutional neural network (CNN).

The fictitious container restricts the scope of writing. It lessens the range of alphabets input changes, including those related to function, scale, or spinning of the printed image. The strain of the upcoming processing is lessened as a result. However, from the perspective of the user, this strategy results in discomfort and writing constraints for clients.

In this paper, we present a single low-cost second net diagram-based, straightforward. Our approach conveniently addresses the first three problems. a CNN-based reputation-building air-writing tool that makes use of a free online diagram, it reaches actual-time popularity. It performs better than conventional methods that rely on written or photographic input.

Building a system that includes detection, and recognition phases. In contrast to other systems, in which users require to complete a word, it permits advanced decoding while the user is writing. The benefits include minimal hardware volume, low latency, cheap computational cost, compact size and heightened sensitivity, no risk to individual privacy, and excellent environmental robustness.

This paper is organized as follows:

Chapter I gives a brief introduction to the paper. Chapter II discusses the existing techniques for air writing. Chapter III describes the literature survey in detail with a table. Finally, the conclusions and references are given in chapters IV and V.

II. EXISTING METHODS FOR AIR – WRITING:

Multiple systems have either utilized specialized detectors or attached a camera, which increases the overall cost of the system to enforce relinquishment of systems is confined. To beaten this problem, use a videotape camera to apply an air-writing system that can be used in any device similar to laptops, TVs, etc. which are conforming to an erected



videotape camera. After that's the information, the stoner writes the integer character in the air in front of a web camera, and the camcorder captures the air-written characters and provide when the Convolutional Neural Network schedule for character revelation. The Convolutional Neural Network module consists of a model for handwritten character recognition, written in the air.

This computer system includes three stages-accession, data processing, and a neural network. The system is done through a web camera. The ground for this algorithm is the air jotting recognition system, which presents a new hand- tracking algorithm to calculate the line of characters/integers that a marijuana smoker wrote in the air. These data are used to learn a Convolutional Neural Network model in the training phase. The CNN model consists of three subcastes - input subcaste, hidden subcaste, and affair subcaste- respectively. During the vaticination, the system captures data from a web camera and predicts the output using the learned models. The CNN model was trained with this captured dataset.

A. Hand Detection:

The system for hand shadowing is realized by the use of image analysis to discover the target fingertip through video footage. This library provides enough functions and installations so

that we can reuse our image with computer vision algorithms, thus resulting in the discovery of the line of the target hand. OpenCV an open-source computer vision library also allows us to track and save its position throughout the videotape.

B. Fingertip Detection:

Writing letters or words in empty space is known as air writing by movement of the fingers or hand with no handheld device. Fingertip detection is performed by an inbuilt camera. By using this hand segmentation and detection are done.

C. Normalization:

Changing the range of pixel intensities is a typical task in image processing called normalisation. By reducing variances, it primarily aims to transform an input image into a set of values that are more recognisable or normal to the senses.

D. Data processing:

An image is passed through a series of convolutional layers, which uprooted the features of the image and used it as input to a trained classifier. The classifier compares the input with the pattern and finds out the matching order for input.

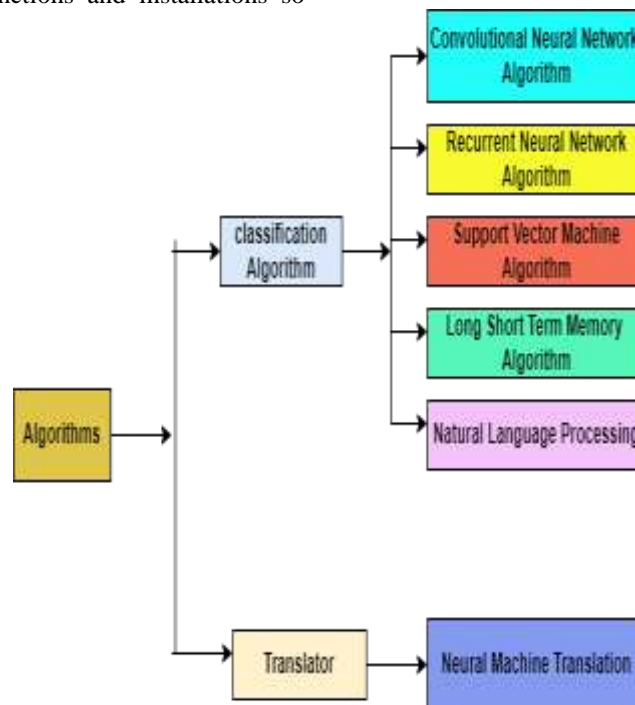


Fig. 2. Block diagram of algorithms used in system

E. Trajectory Acquisition:

Studies have been done on the reflection and movement of a hand a very long time, but it's still only delicate task if real-time and robustness prosecution be needed. A line-grounded jotting system is writing a word or character by moving a cutlet or hand. Where typical pen-up and pen-down writing

systems aren't employed, it is largely applicable. The depth camera tracking the fingertip gathers 3D circles for the air-writing detection system. The neighbour and root point that is closest restatement were used to homogenize better point selection using the line test was done on a different dataset.



F. Convolutional Neural Network:

Convolutional Neural Networks can be used for a variety of tasks. Due to its convolution and pooling layers, the standard CNN network contains a lot of calculations; it is capable of identifying and classifying objects visually by first processing the images.[7] The CNN contains the layer as follows:

Input Layer: Images are read in here. In the hidden layer, feature extraction is performed with a line of convolutional layer

Convolution Layer: This layer is used to extract features. Reducing the spatial dimensionality can help reduce distractions for readers. The output of this layer is a pooled featured map, which helps reduce the visual noise.

Activation Layer: This layer introduces non linearity in the system. It's also called a classification layer, and it's used as a classifier in the CNN algorithm.

Output Layer: This is also called as the final layer, and it's used as finders for classifying objects in the CNN algorithm

III. LITERATURE SURVEY

A literature review is an important part of exploration that collects and analyzes information about the literature on a particular content. In a literature review, authors generally identify applicable workshop, epitomize their main findings, and punctuate their advantages and limitations. Algorithms used in the literature are also described along with the performance criteria used to estimate them.

Table I: The table 1 below describes the literature including author, title of the paper, algorithms and techniques, limitations, advantages, and performance

IV. CONCLUSION

After conducting a research in several applications, after taking into account all the information in the introductory part and came up with a solution. In this paper, we suggest deep CNNs for recognizing air-writing digits and unique direction signals for control akin to a smart TV. With the development of a reliable air-writing trajectory acquisition technique based on a web camera, sophisticated finger-tracking methods are bypassed in favour of simple hand tracking. This technology enables users to write characters in the air using hand gestures and also restate them into written text using convolutional neural networks. It captures hand movements in real-time and processes them through the CNN algorithm to recognize the characters being written with high delicacy. Farther exploration in this area could lead to advancements in the delicacy, speed, and usability of air writing character recognition and restatement systems, making them more extensively accessible and useful for a variety of operations[11].

V. REFERENCE

- [1] Zhangjie Fu, Jiashuang Xu, Zhuangdi Zhu, Alex X. Liu, Xingming Sun, "Writing in the Air with WiFi Signals for Virtual Reality Devices", *IEEE Transactions on Mobile Computing*, vol.18,no.2,pp.473-484,2019.
- [2] Basheer Alwaely, Charith Abhayaratne, "Graph Spectral Domain Feature Learning With Application to in-Air Hand-Drawn Number and Shape Recognition", *IEEE Access*vol.7,pp.159661-159673,2019.
- [3] M. Chen, G. AlRegib, and B.-H. Juang, "Air-writing recognition—Part II: Detection and recognition of writing activity in continuous stream of motion data," *IEEE Trans. Human-Mach. Syst.*, to be published.
- [4] M. Chen, G. AlRegib, and B.-H. Juang, "Feature processing and modeling for 6d motion gesture recognition," *IEEE Trans. Multimedia*, vol. 15, no. 3, pp. 561–571, Apr. 2013.
- [5] Vishal Vaidya, T. Pravanth, D Viji, "Air Writing Recognition Application for Dyslexic People", 2022 International Mobile and Embedded Technology Conference (MECON), pp.553-558,2022.
- [6] Abdelghafar R. Elshenaway, Shawkat K. Guirguis, "On-Air Hand-Drawn Doodles for IoT Devices Authentication During COVID-19", *IEEE Access*, vol.9,pp.161723-161744,2021.
- [7] Nermine Hendy, Haytham M. Fayek, Akram Al-Hourani, "Deep Learning Approaches for Air-Writing Using Single UWB Radar", *IEEE Sensors Journal*, vol.22, no.12, pp.11989-12001, 2022.
- [8] Salma Tamer, Ayman Atia, "Recognition of Butterfly strokes using different Machine Learning Models", 2022 International Conference on Electrical, Computer and Energy Technologies (ICECET), pp.1-6, 2022.
- [9] Hyeonmin Lee, Yonghee Lee, Hanho Choi, Seongwook Lee, "Digit Recognition in Air-Writing Using Single Millimeter-Wave Band Radar System", *IEEE SensorsJournal*, vol.22, no.10,pp.9387-9396,2022
- [10] Zhongyuan Fang, Kai Tang, Liheng Lou, Wensong Wang, Bo Chen, Yisheng Wang, Yuanjin Zheng, "A Silicon-Based Adaptable Edge Coherent Radar Platform for Seamless Health Sensing and Cognitive Interactions With Human Subjects", *IEEE Transactions on Biomedical Circuits and Systems*, vol.16,no.1,pp.138-152,2022.
- [11] Chaur-Heh Hsieh, You-Shen Lo, Jen-Yang Chen, Sheng-Kai Tang, "Air-Writing Recognition Based on Deep Convolutional Neural Networks", *IEEE Access*, vol.9, pp.142827-142836, 2021.
- [12] Matteo Perotto, Luca Gemma, Davide Brunelli, "Non-Invasive Air-Writing Using Deep Neural Network", 2021 IEEE International Workshop on Metrology for Industry 4.0& IoT (MetroInd4.0&IoT), pp.88-93, 2021.
- [13] Tingxuan Liang, Hongtao Xu, "A Posture Recognition Based Fall Detection System using a 24GHz CMOS



- FMCW Radar SoC", 2021 IEEE MTT-S International Wireless Symposium (IWS), pp.1-3,2021.
- [14] Yuqi Luo, Jiang Liu, Shigeru Shimamoto, "Wearable Air-Writing Recognition System employing Dynamic Time Warping", 2021 IEEE 18th Annual Consumer Communications & Networking Conference (CCNC), pp.1-6, 2021.
- [15] Ghada Alhussein, Mohanad Alkhodari, Ahsan Khandokher, Leontios J. Hadjileontiadis, "Emotional Climate Recognition in Interactive Conversational Speech Using Deep Learning", 2022 IEEE International Conference on Digital Health (ICDH), pp.96-103, 2022.
- [16] Fuad Al Abir, Md. Al Siam, Abu Sayeed, Md. Al Mehedi Hasan, Jungpil Shin, "Deep Learning Based Air-Writing Recognition with the Choice of Proper Interpolation Technique", *Sensors*, vol.21, no.24, pp.8407, 2021.
- [17] P. Molchanov, S. Gupta, K. Kim and K. Pulli, "Short-range FMCW monopulse radar for hand-gesture sensing," 2015 IEEE Radar Conference (RadarCon), Arlington, VA, 2015, pp. 1491-1496.
- [18] J. Lien, et. al., "Soli: Ubiquitous gesture sensing with mm-wave radar", *ACM Trans. Graphics*, vol. 35, no. 4, 2016, Art. no. 142.
- [19] S. Wang, J. Song, J. Lien, I. Poupyrev, O. Hilliges, "Interacting with soli: Exploring fine-grained dynamic gesture recognition in the radiofrequency spectrum", In *Proceedings of the 29th Annual Symposium on User Interface Software and Technology 2016 Oct 16* (pp. 851-860), ACM.
- [20] Z. Zhang, Z. Tian, and M. Zhou, "Latern: Dynamic Continuous Hand Gesture Recognition Using FMCW Radar Sensor", *IEEE Sensors Journal*, Vol. 18, No. 8, pp. 3278-3289, April 15, 2018.
- [21] S. Hazra, A. Santra, "Robust Gesture Recognition Using Millimetric- Wave Radar System", *IEEE Sensors Letters*, Vol. 2, No. 4, Dec. 2018
- [22] T. Fan, C. Ma, Z. Gu, and Q. Lv, J. Chen, D. Ye, J. Huangfu, Y. Sun, C. Li, L. Ran, "Wireless Hand Gesture Recognition Based on Continuous- Wave Doppler Radar Sensors", *IEEE Transactions on Microwave Theory and Techniques*, 2016.
- [23] Akl, C. Feng and S. Valaee, "A novel accelerometer-based gesture recognition system", *IEEE Trans. Signal Process.*, vol. 59, no. 12, pp.6197-6205, 2011
- [24] Amma C, Gehrig D, Schultz T, "Airwriting recognition using wearable motion sensors," *Proceedings of the 1st augmented human international conference, AH 2010*, Vol.83, pp.333-334, 2010
- [25] G. Lefebvre, S. Berlemont, F. Mamalet, C. Garcia, "Inertial Gesture Recognition with BLSTM-RNN", *Artificial Neural Networks*, vol 4, pp.393-410,2015
- [26] Gorka Marqués, Koldo Basterretxea, "Efficient Algorithms for Accelerometer-Based Wearable Hand Gesture Recognition Systems", *Embedded and Ubiquitous Computing(EUC)*, 2015 IEEE 13th International Conference, pp. 132-139, 2015
- [27] J. Kela, P. Korpiää, J. Mäntyjärvi, S. Kallio, G. Savino, & L. Jozzo, "Accelerometer- based gesture control for a design environment", *Personal & Ubiquitous Computing*, pp. 285-299, 2006
- [28] M. Georgi, C. Amma, T. Schultz, "Fusion and Comparison of IMU and EMG Signals for Wearable Gesture Recognition", *Biomedical Engineering Systems and Technologies*, Vol 574, *Communications in Computer and information Science*, pp. 308-323, 2016
- [29] "Zhang, X.; Ye, Z.; Jin, L.; Feng, Z.; Xu, S. A new writing experience: Finger writing in the air using a Kinect sensor. *IEEE Multimed.* 2013, 20, 85–93.
- [30] Kumar, P.; Saini, R.; Roy, P.P.; Dogra, D.P. Study of Text Segmentation and Recognition Using Leap Motion Sensor. *IEEE Sens. J.* 2017, 17, 1293–1301. [CrossRef]
- [31] Zhou, Y.; Dai, Z.; Jing, L. A controlled experiment between two methods on ten-digits air writing. In *Proceedings of the 2016 16th IEEE International Conference on Computer and Information Technology*, Nadi, Fiji, 8–10 December 2016; pp. 299–302.
- [32] Chen, M.; AlRegib, G.; Juang, B.-H. Air-Writing Recognition—Part I: Modeling and Recognition of Characters, Words, and Connecting Motions. *IEEE Trans. Hum.-Mach. Syst.* 2016, 46, 403–413. [CrossRef]
- [33] Wang, J.S.; Chuang, F.C. An accelerometer-based digital pen with a trajectory recognition algorithm for handwritten digit and gesture recognition. *IEEE Trans. Ind. Electron.* 2012, 59, 2998–3007.
- [34] Yana, B.; Onoye, T. Air-writing recognition based on fusion network for learning spatial and temporal features. *IEICE Trans. Fundam. Electron. Commun. Comput. Sci.* 2018, E101A, 1737–1744.
- [35] "Babenko, B., Yang, M.-H., and Belongie, S. (2011). Robust object tracking with online multiple instance learning. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 33(8):1619–1632.
- [36] Bambach, S., Lee, S., Crandall, D. J., and Yu, C. (2015). Lending a hand: Detecting hands and recognizing activities in complex egocentric interactions. In *Computer Vision (ICCV)*, 2015 IEEE International Conference on, pages 1949–1957. IEEE.
- [37] Behera, S. K., Dogra, D. P., and Roy, P. P. (2017). Analysis of 3d signatures recorded using leap motion sensor. *Multimedia Tools and Applications*, pages 1–26. Behera, S. K., Dogra, D. P., and Roy, P. P. (2018). Fast recognition and verification of 3d air signatures using convex hulls. *Expert Systems with Applications*, 100:106–119.
- [38] Chang, H. J., Garcia-Hernando, G., Tang, D., and Kim, T.-K. (2016). Spatio-temporal hough forest for efficient detection–localisation–recognition of fingerwriting in



- egocentric camera. *Computer Vision and Image Understanding*, 148:87–96.
- [39] Chen, M., AlRegib, G., and Juang, B.-H. (2016). Air-writing recognition part ii: Detection and recognition of writing activity in continuous stream of motion data. *IEEE Transactions on Human-Machine Systems*, 46(3):436–444.
- [40] Ciregan, D., Meier, U., and Schmidhuber, J. (2012). Multi-column deep neural networks for image classification. In *Computer Vision and Pattern Recognition (CVPR)*, 2012 IEEE conference on, pages 3642–3649. IEEE."
- [41] Yuran Hu, Zeyu Chen, "Kinect-Based Face Recognition and Its Application in MOOCs Production", 2015 7th International Conference on Intelligent Human-Machine Systems and Cybernetics, vol.2, pp.298-301, 2015.
- [42] Md. Abdur Rahim, Jungpil Shin, Md. Rashedul Islam, "Gestural flick input-based non-touch interface for character input", *The Visual Computer*, vol.36, no.8, pp.1559, 2020.
- [43] Adil Rahman, Prasun Roy, Umapada Pal, "Continuous Motion Numeral Recognition Using RNN Architecture in Air-Writing Environment", *Pattern Recognition*, vol.12046, pp.76, 2020.
- [44] Yu-Cheng Fan, Meng-Ying Lee, "3D Gesture and Finger Interaction for Floating Handwriting Recognition", 2022 5th World Symposium on Communication Engineering (WSCE), pp.65-68, 2022
- [45] Arun M George, Andrew Gigie, A Anil Kumar, Sounak Dey, Arpan Pal, K Aditi, "EchoWrite-SNN: Acoustic Based Air-Written Shape Recognition Using Spiking Neural Networks", 2022 IEEE International Symposium on Circuits and Systems (ISCAS), pp.1067-1071, 2022.
- [46] .R. ShanmugaPriya, G. Magesh, "Gesture Recognition based Fingertip Air Writing to Text Convertor using Image Processing and HCI", 2022 8th International Conference on Advanced Computing and Communication Systems (ICACCS), vol.1, pp.316-320, 2022.
- [47] Abdelghafar R. Elshenaway, Shawkat K. Guirguis, "On-Air Hand-Drawn Doodles for IoT Devices Authentication During COVID-19", *IEEE Access*, vol.9, pp.161723-161744, 2021.
- [48] Matteo Perotto, Luca Gemma, Davide Brunelli, "Non-Invasive Air-Writing Using Deep Neural Network", 2021 IEEE International Workshop on Metrology for Industry 4.0 & IoT (MetroInd4.0&IoT), pp.88-93, 2021.
- [49] Qiang Fu, Jiajun Fu, Jian Guo, Shuxiang Guo, Xun Li, "Gesture Recognition based on BP Neural Network and Data Glove", 2020 IEEE International Conference on Mechatronics and Automation (ICMA), pp.1918-1922, 2020.
- [50] Pengcheng Wang, Junyang Lin, Fuyue Wang, Jianping Xiu, Yue Lin, Na Yan, Hongtao Xu, "A Gesture Air-Writing Tracking Method that Uses 24 GHz SIMO Radar SoC", *IEEE Access*, vol.8, pp.152728-152741, 2020.
- [51] Shun Zhang, Shizhou Zhang, "A Novel Human-3DTV Interaction System Based on Free Hand Gestures and a Touch-Based Virtual Interface", *IEEE Access*, vol.7, pp.165961-165973, 2019.
- [52] Tanmay Sankhe, Pranav Puranik, Masira Mulla, "Futuristic Finger and its Modern Day Applications", 2019 International Conference on Issues and Challenges in Intelligent Computing Techniques (ICICT), vol.1, pp.1-7, 2019.
- [53] Vishal Vaidya, T. Pravanth, D Viji, "Air Writing Recognition Application for Dyslexic People", 2022 International Mobile and Embedded Technology Conference (MECON), pp.553-558, 2022.
- [54] Shaurya Gulati, Ashish Kumar Rastogi, Mayank Virmani, Rahul Jana, Raghav Pradhan, Chetan Gupta, "Paint / Writing Application through WebCam using MediaPipe and OpenCV", 2022 2nd International Conference on Innovative Practices in Technology and Management (ICIPTM), vol.2, pp.287-291, 2022.
- [55] Pranav Puranik, Tanmay Sankhe, Avinash Singh, Vikas Vishwakarma, Pradnya Rane, "AirNote – Pen it Down!", 2019 10th International Conference on Computing, Communication and Networking Technologies (ICCCNT), pp.1-7, 2019.
- [56] Vincy Joseph, Aditi Talpade, Nishitha Suvarna, Zeena Mendonca, "Visual Gesture Recognition for Text Writing in Air", 2018 Second International Conference on Intelligent Computing and Control Systems (ICICCS), pp.23-26, 2018.
- [57] Kosmas Kritsis, Aggelos Gkiokas, Aggelos Pikrakis, Vassilis Katsouras, "DanceConv: Dance Motion Generation With Convolutional Networks", *IEEE Access*, vol.10, pp.44982-45000, 2022.
- [58] R. ShanmugaPriya, G. Magesh, "Gesture Recognition based Fingertip Air Writing to Text Convertor using Image Processing and HCI", 2022 8th International Conference on Advanced Computing and Communication Systems (ICACCS), vol.1, pp.316-320, 2022.
- [59] Vishal Vaidya, T. Pravanth, D Viji, "Air Writing Recognition Application for Dyslexic People", 2022 International Mobile and Embedded Technology conference (MECON), pp.553-558, 2022
- [60] Abdelghafar R. Elshenaway, Shawkat K. Guirguis, "On-Air Hand-Drawn Doodles for IoT Devices Authentication During COVID-19", *IEEE Access*, vol.9, pp.161723-161744, 2021.
- [61] Marie Claire C. Escopete, Christian G. Lalon, Ezekiel M. Llarenas, Pars M. Reyes, Roselito E. Tolentino, "Recognition of English Capital Alphabet in Air writing



Using Convolutional Neural Network and Intel RealSense D435 Depth Camera", 2021 2nd Global Conference for Advancement in Technology(GCAT),pp.1-8,2021.

[62] Prabhat Kumar, Abhishek Chaudhary, Abhishek Sharma, "A CNN Based Air-Writing Recognition Framework for Multilinguistic Characters and Digits", SN Computer Science, vol.3, no.6, 2022.

[63] Md. Shahinur Alam, Ki-Chul Kwon, Shariar Md Imtiaz, Md Biddut Hossain, Bong-Gyun Kang, Nam Kim, "TARNet: An Efficient and Lightweight Trajectory-Based Air-Writing Recognition Model Using a CNN and LSTM Network", Human Behavior and Emerging Technologies, vol.2022, pp.1, 2022.

[64] Harry D. Mafukidze, Amit K. Mishra, Jan Pidanic, Schonken W. P. Francois, "Scattering Centers to Point Clouds: A Review of mmWave Radars for Non-Radar-Engineers", IEEE Access, vol.10, pp.110992-111021, 2022.

[65] Shahzad Ahmed, Wancheol Kim, Junbyung Park, Sung Ho Cho, "Radar-Based Air-Writing Gesture Recognition Using a Novel Multistream CNN Approach", IEEE Internet of Things Journal, vol.9, no.23, pp.23869-23880, 2022.

[66] Yuchen Li, Changzhan Gu, Junfa Mao, "4-D Gesture Sensing Using Reconfigurable Virtual Array Based on a 60-GHz FMCW MIMO Radar Sensor", IEEE Transactions on Microwave Theory and Techniques, vol.70, no.7, pp.3652-3665, 2022.

[67] Muhammad Arsalan, Avik Santra, Vadim Issakov, "Spiking Neural Network-Based Radar Gesture Recognition System Using Raw ADC Data", IEEE Sensors Letters, vol.6, no.6, pp.1-4, 2022.

[68] Nermine Hendy, Haytham M. Fayek, Akram Al-Hourani, "Deep Learning Approaches for Air-Writing Using Single UWB Radar", IEEE Sensors Journal, vol.22, no.12, pp.11989-12001, 2022.

[69] Hyeonmin Lee, Yonghee Lee, Hanho Choi, Seongwook Lee, "Digit Recognition in Air-Writing Using Single Millimeter-Wave Band Radar System", IEEE Sensors Journal, vol.22, no.10, pp.9387-9396, 2022.

[70] R. ShanmugaPriya, G. Magesh, "Gesture Recognition based Fingertip Air Writing to Text Convertor using Image Processing and HCI", 2022 8th International Conference on Advanced Computing and Communication Systems (ICACCS), vol.1, pp.316-320, 2022.

[71] Shruti Gedam, Urmila Shrawankar, "Challenges and opportunities in finger spelling recognition in air", 2017 International Conference on Innovative Mechanisms for Industry Applications (ICIMIA), pp.60-65, 2017.

[72] Pradeep Kumar, Rajkumar Saini, Partha Pratim Roy, Debi Prosad Dogra, "Study of Text Segmentation and Recognition Using Leap Motion Sensor", IEEE Sensors Journal, vol.17, no.5, pp.1293-1301, 2017.

TABLE I: LITERATURE SURVEY

Author	Title	Technology And Algorithm	Performance Criteria	Advantages	Limitations	Reference
B.-H. Juang, G.AiRegib, and M. Chen	Modeling and Recognition of Characters, Words, and Linking Motions in Air-Writing Part 1 [1]	HMM, motion trajectory models, ligature models, Re-estimated Character models,Ligature Models [1]	word error rate = 0.8%, letter-based recognition=1.9%	Percentage text encoding, percentage improve recognition by decoding user types.	-	[1], [2], [3], [4]
B.-H. Juang, G.AiRegib, and M. Chen	Part 2 of Air-Writing Recognition: Identifying Writing Activity in Continuous Stream of Motion Data [5]	Technology (GMM and HMM) Algorithms (Window-Based Approach)	precision	Create an aerial writing system that includes both discovery, recognition stages, allowing recognition of how the recognized note portion	The letter I itself is easily broken and cannot be found.[5]	[5]



				affects the recognition effect [5]		
Y. Luo, J. Liu, Waseda University Tokyo, Japan	Identification of Writing Activity in Continuous Stream of Motion Data, Part 2 of Air-Writing Recognition [6]	MEMS with DTW	73% overall character accuracy, high recognition accuracy, and significantly improved system robustness, character accuracy =84.6%, number accuracy = 98.2%, character (“A”to“Z”) accuracy = 64 %. [7]	Small hardware volume, low latency, low computational cost, improved sensitivity, and high robustness to environmental conditions [7]	The DTW-based system will be a competitive option for severe circumstances, especially where time and sample quantity are constraints.	[6], [7], [8]
N. Yan 1,2, P. W. 1,2, J. Lin 2, F. Wang 2, and J. Xiu2; and H. Xu 1,2	An Air-Writing Gesture Tracking Approach Using a 24 GHz SIMO Radar SoC [6]	1.signal model of FMCW radar 2.Radar parameter signal 3.Target detection and tracking RTS algorithm [13]	comparing the three smoothing algorithms, the RTS smoothing. Validation Accuracy: 97.6%	Used to solve the problem of drawing characters on flat areas [14]	Camera Base, RFID - Base, Wifi - Base, Motion Sensor	[6], [9], [10], [11], [12], [13], [14]
You-Shen Lo1, C. Hsieh1, J. Y. Chen2, and S. K. Tang2	Recognition of Airwriting Using Deep Convolutional Neural Networks [15]	CNN algorithm, camshaft algorithm, skin pixel detection algorithm, face detection algorithm, gradient descent optimization algorithm, (MBGD) the algorithm, Adam algorithm [15]	CNN achieves excellent performance with over 99% recognition rate. [16]	-	-	[15], [16]
A. Santra and M. Arslan	Using a network of radars to recognise airwriting for human-machine interface [19]	LSTM, BLSTM, Conv LSTM Algorithm, Alpha-Beta Tracking Algorithm, Signal Processing Algorithm, Single Target Tracking/Smoothing Algorithm [20]	Performance of digits, drawn characters = 98:33 accuracy. Improved training data and classification accuracy = 4-5% on average	Does not work with depth or motion sensors. You need to let the system know the end of your character by removing the hand marker from the virtual board.[21]	-	[17], [18], [19], [20], [21], [22]



Y. Xue and S. Xu	Modeling and Recognition of Air-Writing Characters Using Modified CHMM [23]	HCI Technology, Viterbi Algorithm, Baum-Welch Algorithm, EM Algorithm, Baum-Welch Algorithm [26]	-	High Performance = 87.52% and 97.42% for TOP-1 and TOP-3, Best Accuracy = 95.91% and 99.58%.	DB1 has no write limits, but DB2 and DB3 have limits at varying levels. [25]	[23], [24], [25], [26], [27], [28]
Md. A. Alam 2, M. Y. A. 1, S. Md Imtiaz 1, and N. Kim 1 are the other members of the team.	Recognizing airwriting using a depth sensor and deep neural networks [29]	gradient descent, HMM, LSTM, CNN, BLSTM algorithms	Accuracy = 99.06%, 99.17%. Accuracy was determined at LSTM = 99.17% and 99.32%	Its straightforward writing style offers a number of advantages over gesture-based solutions. [33]	-	[29], [30], [31], [32], [33], [34]
A. D. Prosad, S. Kard, S. Mukherjee, Sk. A. Ahmed, and P. P. Roy	Tracking and Detecting Fingertips to Recognize Air-Writing in Videos [35]	R-CNN framework, CNN, HMM, LSTM, GMM	Character recognition accuracy = 96.11 %	-	-	[35], [36], [37], [37], [38], [39], [40]
S. Xu, L. Jin, Z. Feng, X. Zhang, Z. Ye,	Finger-Writing-In-The-Air Kinect Sensor System [41]	HCI, GMM, dual-mode switching algorithm	Over all accuracy rate = 90%	Advantages of Kinect depth information is robust to environmental changes and overlapping thresholding or Gaussian segmentation [41]	-	[41], [42], [43]
V. Joseph, N. Suvarna, A. Talpade, and Z. Mendonca	Recognition of Visual Gestures for Writing Air Text [45]	CNN, gesture recognition, neural network training algorithms, Gaussian blur, and doorstep algorithms, convex hull algorithms [44]	Accuracy	-	-	[44], [45], [46], [47], [48], [49], [50], [51], [52]



P. Ramasamy, Dr. R. S.	A Cheap Air Writing System That Uses a Web Camera to Transform Finger Actions into Text [53]	Gesture recognition mathematical algorithms	-	-	-	[53], [54], [55], [56]
K. Kritsis, V. Katsouros, and G. Bastas	Deep Convolutional and Recurrent Neural Network Architectures for Air-Writing Recognition [57]	gesture recognition, DL, LSTM, CNN, TCN	-	-	Limitations of two different approaches and tested neural architectures.	[57], [58], [59], [60], [61], [62], [63]
A. Santra and M. Arslan	Using a network of radars to recognise characters in airwriting for human-machine interface [64]	TOF technology, dual-mode algorithms, signal, CNN and LSTM algorithms	The time-series trajectory approach's classification performance uses LSTM, BLSTM, and Conv LSTM with CTC loss functions.66]	-	-	[64], [65], [66], [67], [68], [69]
S. Honda and T. Asano	Character handwriting gestures on a visual interface system [70]	Recognition Algorithm	-	An advantage of multi-camera systems is that gestures can be recognized regardless of their original orientation. [71]	-	[70], [71], [72]

IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



OPEN ACCESS

Free and unrestricted access to research for all.



GLOBAL REACH

Connecting researchers and professionals worldwide.



TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website

www.ijeast.com



INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

✉ editor@ijeast.com

🌐 www.ijeast.com

📍 India



2455-2143